



ONTEC-G

2 W Emergency Lighting LED Luminaire

Order Code : 3116572
Product Code : EXIT ONTEC-G SU IP 20 ST A3 KS



Product Data


Standard Features

Housing	: RAL 9003 painted PC housing and cover
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: Mid power LED
Emergency Kit Options	: 3 hours
Run Mode	: Non maintained

Optical & Electrical Features

Power Consumption	: 1.6 W
Final Luminous Flux	: 128 lm
Efficacy	: 80 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 5700K
Color Rendering Index	: >70

Photometric Curve

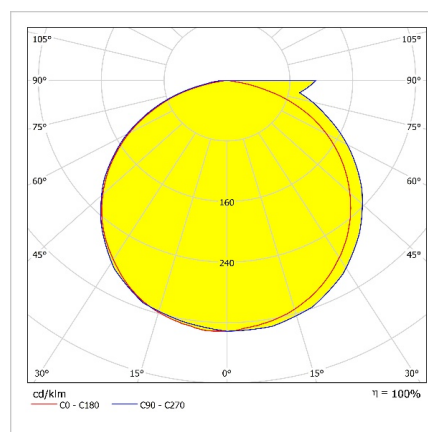


Other Features & Conditions

Operating Temperature Range With Emergency Kit	: +10 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 50.000 hours @Ta= 35 °C

ONTEC-G

2 W Emergency Lighting LED Luminaire

3116572 EXIT ONTEC-G SU IP 20 ST A3 KS

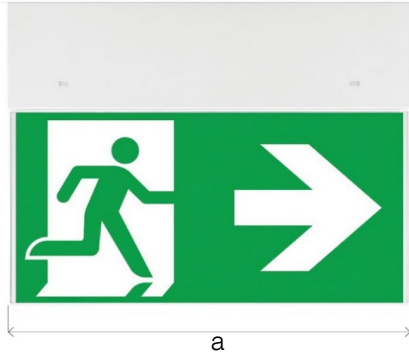

Dimensions (mm)

	a	b	h	h1
Standard	251,5	29	69	131

Weight (gr)

Standard	362
----------	-----



- EAE, reserves the right to make changes without prior notice.



Revision date: 17.10.2017