



**INDUSTRY  
LIGHTING PRODUCTS**



**Publisher**

EAE Lighting

**Creation and design**

EAE Lighting

**Image credits**

EAE Lighting

**Disclaimer**

We assume no responsibility for the content of references cited in this catalog. The content of the references is the sole responsibility of their publishers.

**Copyright**

All contents of this catalog are protected by copyright. The contents may not be stored, reproduced, distributed or used in any other way without the express written permission of EAE Aydınlatma A.Ş.

# Contents

SROUND INDUSTRY	8
SROUND	10
SROUND NG	12
GARLED MEGA	14
REVOLED-X	16
REVOLED-X HE NG / NG / NG 50X50	18
REVERO	20
RERERO NG	22
RERERO SQ	24
HBL	26
HBC	28
VALERIA	30
PROLIT KOMPAKT	32
PROLIT	34
PROLIT PLUS	36
PROLIT PLUS APRON	38
PROLIT EFFECT	40
MFL	42
GPRONA	44



SPRONA	46
SPRONA PLUS	48
KANOLED	50
RA / RA2 / RA3 / RA CLASS II	52
HORUS 1-2	54
OSIRIS	56
ARKTOS NG V2	58
INFINOO	60
M-LINE	64
GALIS MEGA	66
GALIS NG / MINI	68
YPB NG	70
LINA NG	72
TORNADO	74
COZAR	76
YPL NG	78
TORIA MEGA	80
SAVIOR MATE	82
DIMKO	84

# EAE Lighting

As EAE Lighting, our adventure of innovation and passion that began in 1983 continues unabated. Thanks to the knowledge and experience of the past 40 years, we have made a name for ourselves with our high-bay luminaires that set the standards in the sector, while combining the same understanding of quality with aesthetics and functionality in our decorative products.

We work with dedication in our modern production facilities, focusing on innovation at every step of our on-going experience. Designed and developed by our R&D department, our products are meticulously tested in our laboratories, helping us to maintain the high standards of quality and durability that are synonymous with EAE Lighting. Thanks to these standards, our long-lasting products bring us one step closer to our goal of a greener world with less waste, less energy onsumption and less use of natural resources.



**1983**  
Established

**%90** **Domestic** approved  
supplier approval



**33,6 Million €**  
R&D Investments



**362**  
Number of employees



**4,4 Million US Dollars**  
Infrastructure Investments,



**4344**  
(Person x Hour) Occupational  
Health and Safety Training,



**2.**  
Turkey Exporters Assembly  
(TIM)



**15966**  
(Person x Hour) Total training  
duration



**2860 GWh**  
Capacity of Renewable  
Energy (GES)



**40**  
Number of countries of  
export



**911 Tonne**  
Recycled Waste Amount



**%91,33**  
Rate of customer satisfaction



**2.3 Million US Dollars**  
Renewable Energy (GES)  
Investments,



**1629 m3**  
Capacity of Rain Water Storage



**%18**  
Number of women employees



**1046**  
(Person X Hour) Sustainability  
and Decarbonisation Training



## Business Areas



### Heavy Industry Oil&Gas

- Petrochemical
- Refinery
- Offshore
- Mining



### Automotive Iron&Steel-Glass

- Automotive and Supply Industries
- Glass Factory
- Iron & Steel- Bloomeries



### Power Plants

- Nuclear Power Plants
- Steam Power Plants
- Combined Cycle Plants
- HES, JES, GES



### Factories Manufacturing Plants

- Textile
- Machinery-Metal
- Plastic
- Food Inc
- Medicine



### Railways & Tunnels

- Metro Tunnels
- Highway Tunnels
- Railway Tunnels
- Train Stations



### Data Centers

- GSM & Telecom Companies
- Co Hosting Service Providers
- Financial Institutions
- Public Data Centers
- Edge Data Centers
- Computer Rooms



### Healthcares

- Public Hospitals
- Private Hospitals
- Clinics
- Laboratories



### Complex Buildings & Towers

- Tower & Skycrapers
- Malls
- Office Buildings
- Hotels
- Residences
- Government Buildings



### Sport Complexes

- Stadiums
- Indoor Sport Complexes
- Olympic Complexes



### Airports

- Terminal Buildings
- Car Park
- Hanger Buildings
- Service Buildings

## Certificate

- ISO 9001: 2015
- ISO 10002: 2018
- ISO 14001: 2015
- ISO 27001: 2013
- ISO 45001: 2018
- ISO 50001: 2018

- ISO 14064-1:2018
- TURKISH ACCREDITATION AGENCY
- DEKRA
- DIALUX PARTNER
- UL SOLUTIONS (DEMKO)



Scan QR Code for  
Certificates

−35°C +80°C



- Iron-Steel & Heavy Industry
- Industry Areas
- Cranes

## High resistance up to +80°C in industrial environments



Ambient operating temperature from −35°C to +80°C



IP65 and IP66 protection & IK09 impact resistance class / Tempered glass



Maximum performance in harsh industrial environments



External box option up to 10 m cable length



Various mounting and fixing options



Unique design



### SROUND Mini (TK)

33 W – 88 W  
4605 lm - 11367 lm

OPTIC  
75° / 103°



### SROUND Industry

52 W – 405 W  
8629 lm - 52400 lm

OPTIC  
Arena / Lowbay




### SROUND DOUBLE


104 W – 810 W  
17258 lm - 104800 lm

OPTIC  
Arena / Lowbay


## Technical Drawing | Industry

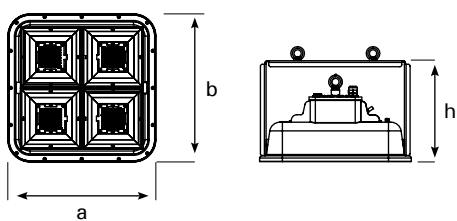


## Technical Drawing | Double

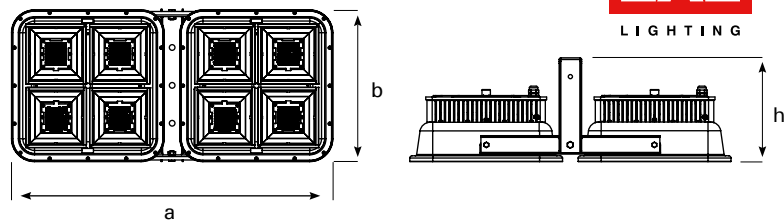

## Technical Drawing | Industry Ext.

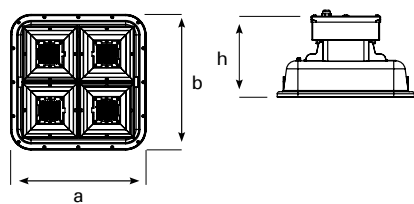

## Technical Drawing | Mini (TK)

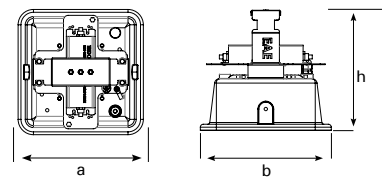


## Dimensions (mm)

	a	b	h
Industry	401	401	269
Double	842	401	276
Industry Ext.	400	400	269
Mini (TK)	265	265	244

## Weight of Excluding External Box (kg)

Industry	8,30
Double	19,10
Mini (TK)	3,50


## External Drive Module

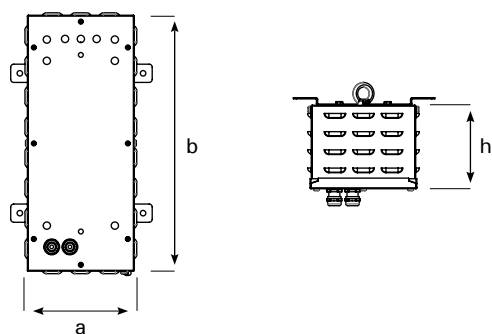

## Dimensions (mm)

	a	b	h
External Drive Module	184	429	138

## Single U Type Hanger Set

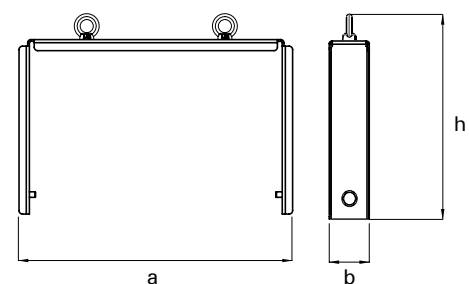

## Dimensions (mm)

	a	b	h
External Drive Module	396	59	290



# SROUND

–25°C +60°C



## For those who aim high

- Aviation
- Automotive Industry
- Logistics
- Glass and Ceramics
- Machinery and Electronics
- Chemical and Plastic
- Wood and Paper
- Sports Halls

- ✓ Ultra-high performance high bay LED luminaire
- ✓ IP65 - IP66 protection & IK09 impact resistance class
- ✓ Ambient operating temperature from –25°C to +60°C
- ✓ Variety of suspension kits allowing different mounting types
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting



### SROUND Mini

33 W – 88 W  
4605 lm – 11367 lm

OPTIC  
75° / 103°

### SROUND IP65 & IP66

52 W – 226 W  
8629 lm – 32400 lm

OPTIC  
Arena / Lowbay /  
Extra-Lowbay

### SROUND Crane

68 W – 173 W  
10500 lm – 25600 lm



OPTIC  
Arena / Lowbay /  
Extra-Lowbay

### SROUND Chemical

69 W – 137 W  
12171 lm – 21506 lm

OPTIC  
Arena / Lowbay /  
Extra-Lowbay

*The values specified above represent the minimum and maximum ranges for all variations of the product.  
To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*

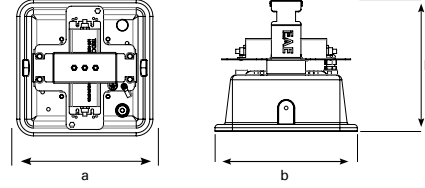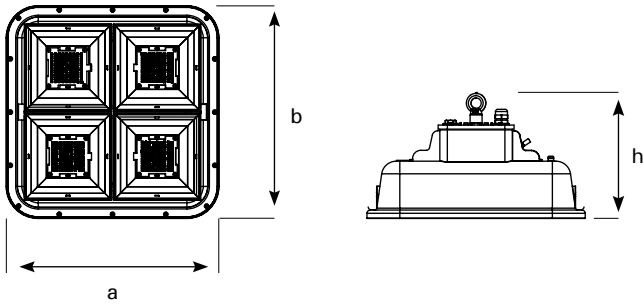


**Dimensions (mm)**

	a	b	h
IP65 & IP66 koruma	400	400	231
Mini	265	265	244
Crane	400	400	231
Chemical	400	400	231


**Weight (kg)**

IP65 & IP66 koruma	7,20
Mini	3,50
Crane	7,70
Chemical	7,20


**Mapa Single Hanger Set**

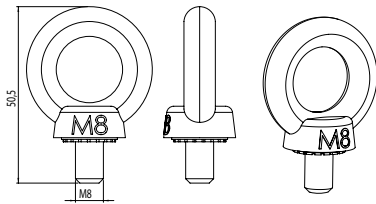


**Single Cable Tray Hanger Set**

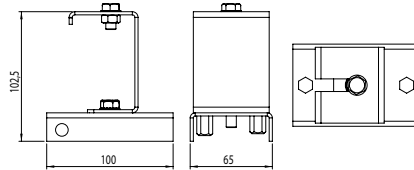


**Single U Type Hanger Set**




**Busbar Hanger Set**

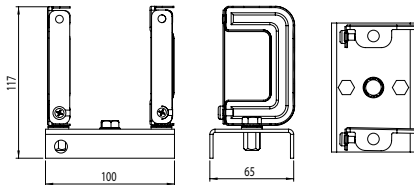


**Double Hanger Set**

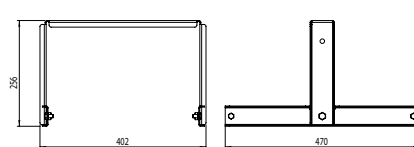


**Angled Hanger Set**

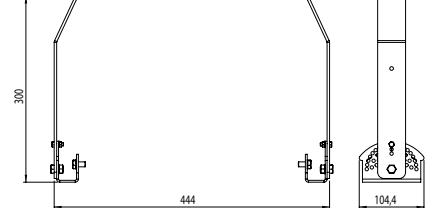

**Double Mapa Hanger Set**



**Double Cable Tray Hanger Set**



# SROUND NG

-20°C +50°C



- Aviation
- Automotive Industry
- Logistics
- Glass and Ceramics
- Machinery and Electronics
- Chemical and Plastic
- Wood and Paper
- Sports Halls

## Lighter, stronger

- ✓ Ultra-high performance high bay LED luminaire
- ✓ IP65 protection class & IK07 impact resistance
- ✓ Wide ambient operating temperature range from -20°C to +50°C
- ✓ Variety of suspension kits allowing different mounting types
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting




### Sround NG

95 W / 108 W / 135 W / 168 W / 187 W  
14733 lm - 26901 lm

#### OPTIC

Arena, Lowbay, Asymmetric

## Technical Drawing | IP65

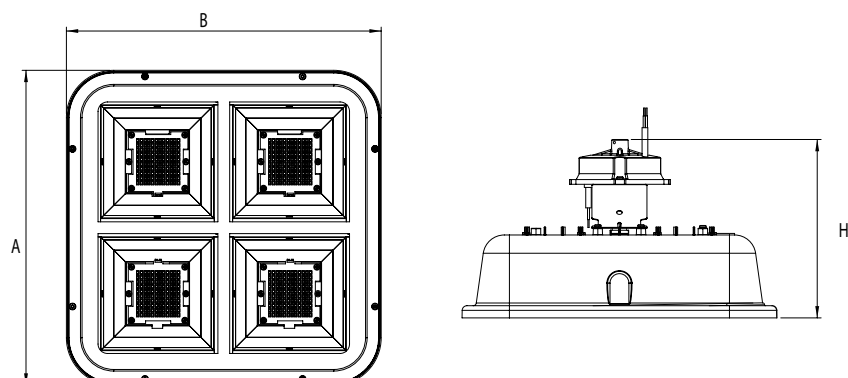


### Dimensions (mm)

	a	b	h
Standard	400	400	231
ACK Model	400	400	245


### Weight (kg)

Standard	5,90
ACK Model	8,30


### EMG Busbar Hanger Set




### Standard Busbar Hanger Set

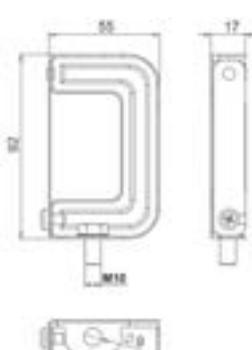

### EMG Mapa / Standard Mapa Hanger Set

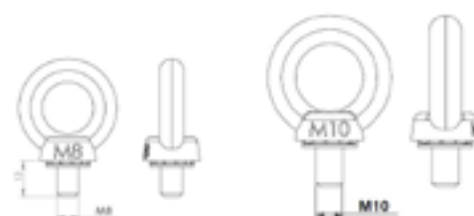

### EMG Cable Tray Hanger Set

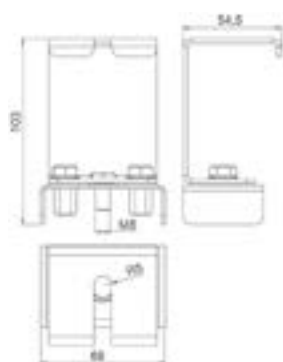

### Standard Cable Tray Hanger Set



# GARLED

## MEGA

-20°C +50°C



## For those who aim high



High performance LED luminaire



IP65 protection & IK09 impact resistance class



Ambient operating temperature from -20°C to +50°C



A variety of suspension kits to allow different types of mounting

- Iron-Steel & Heavy Industry
- Aviation
- Automotive Industry
- Logistics
- Glass and Ceramics
- Machinery and Electronics
- Chemical and Plastic
- Wood and Paper
- Sports Halls



### GARLED MEGA


46W / 80W / 127W / 160W / 215W  
7000 lm - 34406 lm

#### OPTIC

15° / 25° / 40° / 60° / 90° / AS



## Technical Drawing | IP65

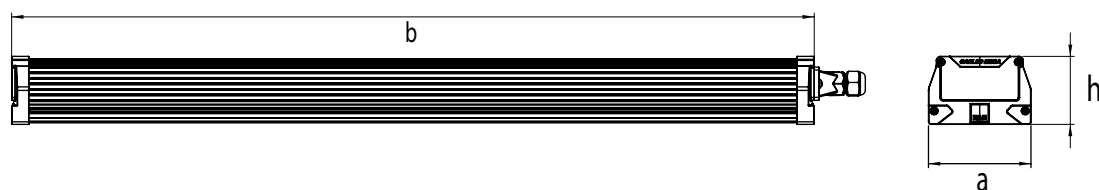

### Dimensions (mm)

	a	b	h
1X	104,3	357	69,2
2X	104,3	613	69,2
3X	104,3	869	69,2
4X	104,3	1125	69,2
5X	104,3	1381	69,2


### Weight (kg)

1X	1,02
2X	1,70
3X	2,35
4X	3,10
5X	3,99


### Busbar Hanger Set



### Busbar Hanger Set (Single)



### Cable Tray Hanger Set



# REVOLED-X



- Iron-Steel & Heavy Industry
- Aviation
- Automotive Industry
- Logistics
- Glass and Ceramics
- Machinery and Electronics
- Chemical and Plastic
- Wood and Paper
- Sports Halls

–30°C +70°C



## Experience performance at the highest level



Ambient operating temperature from –30°C to +70°C



IP65 - IP66 protection & IK07 - IK08 - IK09 impact resistance class



Mounting types: Cable tray / Busbar / Angled wall / Seismic



Up to 3 hours emergency kit / DALI - Wireless control options RF



### REVOLED-X

28 W – 128 W  
4163 lm – 21078 lm

#### OPTIC

30°x90° / 30° / 60° / 90° /  
AS / DA / 25x105°



### REVOLED-X EVO

67 W – 338 W  
9008 lm – 44226 lm

#### OPTIC

30°x90° / 30° / 60° / 90° / AS  
/ DA / 25x105°



### REVOLED-X EVO IP65

67 W – 338 W  
9008 lm – 44226 lm

#### OPTIC

30°x90° / 30° / 60° / 90° /  
AS / DA / 25x105°



### REVOLED-X HOT / HOT PLUS

28 W – 128 W  
4294 lm – 21078 lm

#### OPTIC

30°x90° / 30° / 60° / 90° /  
AS / DA / 25x105°



### REVOLED-X SPORT

28 W – 337 W  
4294 lm – 42102 lm

#### OPTIC

30°x90° / 30° / 60° / 90° /  
AS / DA / 25x105°



### REVOLED-X STERIL

28 W – 128 W  
4294 lm – 21078 lm

#### OPTIC

30°x90° / 30° / 60° / 90° /  
AS / DA / 25x105°



### REVOLED-X FOOD / FOOD COLD

28 W – 128 W  
4294 lm – 21078 lm


#### OPTIC

30°x90° / 30° / 60° / 90° /  
AS / DA / 25x105°

*The values specified above represent the minimum and maximum ranges for all variations of the product.*

*To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*

## Technical Drawing

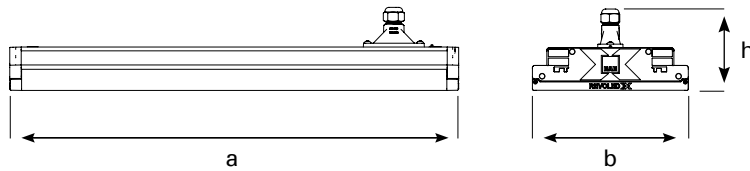


### Dimensions (mm)

	a	b	h
Standard	423	209	109
Dali CG (Dual Input)	493	209	109
1,3 hours EMG*	950	209	109
Boxed 1.3 hours EMG*	603	209	135


### Weight (kg)

Standard	3,24
Dali CG (Dual Input)	3,77
1,3 hours EMG*	7,26
Boxed 1.3 hours EMG*	7,00


### Busbar Hanger Set ( SL / DL )




### Cable Tray Hanger Set



### Angular Hanger Set

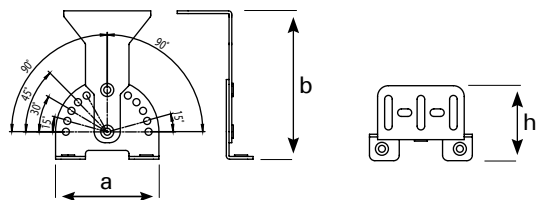


### Seismic Hanger Set

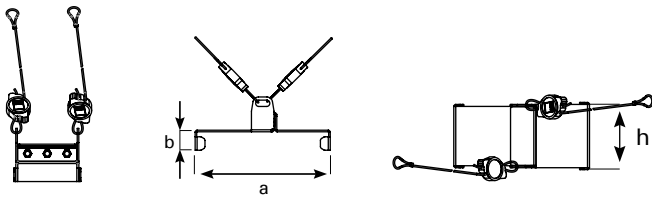


### Dimensions (mm)

	a	b	h
Busbar Hanger Set (SL/DL)	78	90	182,5
Double Busbar Hanger Set	182,6	-	90
Cable Tray Hanger Set	48	110	90
Double Tray Hanger Set	358,60	-	90


### Double Busbar Hanger Set ( SL/DL )

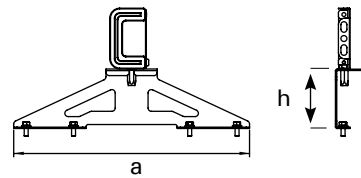


### Double Tray Hanger Set



### 90° Busbar Hanger Set ( SL/DL )

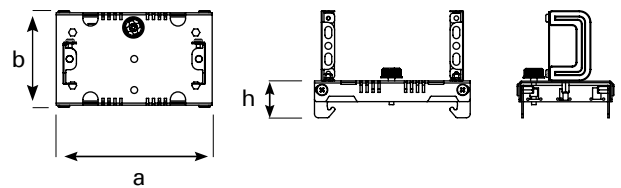

### 90° Cable Tray Hanger Set

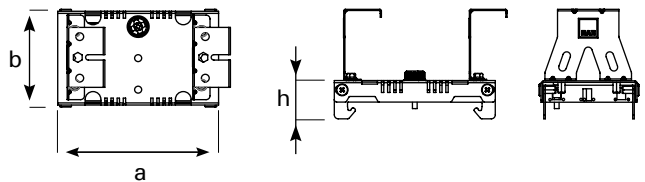

### Dimensions (mm)

	a	b	h
Angular Hanger Set	95	135	69,5
90° Busbar Hanger Set (SL/DL)	205	122	48
Seismic Hanger Set	171,88	25,30	75
90° Cable Tray Hanger Set	205	122	48

# REVOLED-X

## HE NG / NG / NG 50x50

-20°C +40°C



## Experience performance at the highest level



Ambient operating temperature from -20°C to +40°C



IP65 protection & IK07 impact resistance class



Mounting types: Cable tray / Busbar / Angled wall / Seismic



Up to 3 hours emergency kit / DALI - Wireless control options RF


- Iron-Steel & Heavy Industry
- Aviation
- Automotive Industry
- Logistics
- Glass and Ceramics
- Machinery and Electronics
- Chemical and Plastic
- Wood and Paper
- Sports Halls



### REVOLED-X HE NG

27 W - 164 W  
3662 lm - 26267 lm

OPTIC  
60° - 90°



### REVOLED-X NG 50x50

68 W - 285 W  
9568 lm - 40782 lm

OPTIC  
60° - 90°



### REVOLED-X NG

27 W - 196 W  
4500 lm - 33000 lm

OPTIC  
60° - 90°

*The values specified above represent the minimum and maximum ranges for all variations of the product.  
To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*




Dimensions (mm)

	a	b	h	h1
HE NG	438,5	203	128	75
NG 50x50	355,5	203	126	75
X NG	442	203	126	75


Weight (kg)

HE NG	4,00
NG 50x50	4,00
X NG	4,00


Busbar Hanger Set

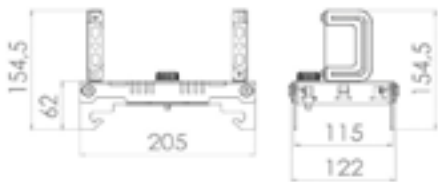


KYS Busbar Hanger Set

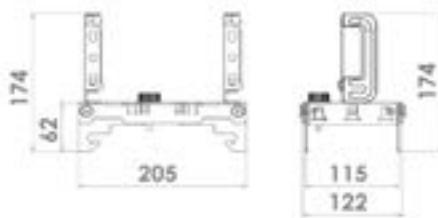


Cable Tray Hanger Set

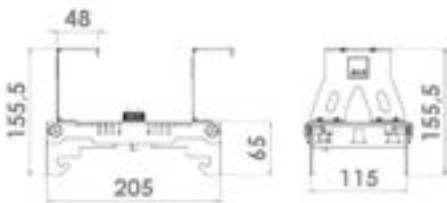


Busbar Hanger Set



KYS Busbar Set



Cable Tray Hanger Set

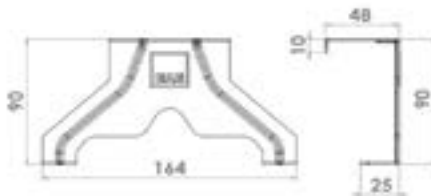



-20°C +40°C



- Industrial Plants
- Aviation and Airports
- Logistics
- Sports Halls

## Maximum comfort in lighting

- ✓ LED luminaire with high ceiling
- ✓ IP65 protection & IK05 impact resistance class / Aluminum injection housing
- ✓ Optical options: transparent diffuser / opal diffuser / microprismatic diffuser
- ✓ Ambient operating temperature from -20°C to +40°C
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting





### REVERO

70 W – 149 W  
9294 lm – 22400 lm

Microprismatic Diffuser /  
Opal Diffuser /  
Transparent Diffuser

## Technical Drawing

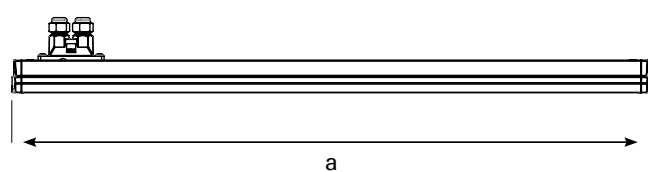


## Dimensions (mm)

	a	b	h
Standard	773	148	92


## Weight (kg)

Standard	1,90


## Busbar Hanger Set ( SL / DL )

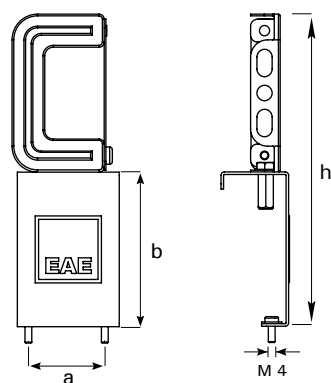

## Cable Tray Hanger Set

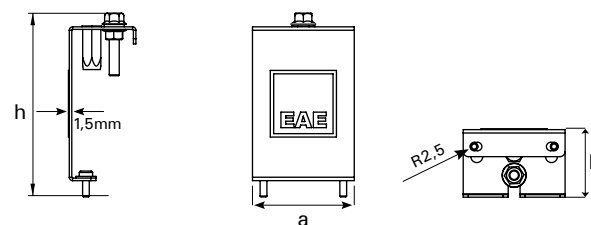

## Angular Hanger Set

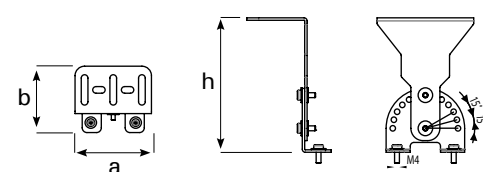

## Dimensions (mm)

	a	b	h
Busbar Hanger Set (SL/DL)	45	90	182
Cable Tray Hanger Set	60	40	107
Angular Hanger Set	47	70	109,5

-20°C +35°C



- Closed Warehouses
- Factories and Workshops
- Sports Halls
- Service Stations
- Commercial Buildings

## Optimum lighting quality, minimum cost

- ✓ IP64 protection & IK08 impact resistance class / Lightweight body design
- ✓ High energy savings for businesses
- ✓ Easy maintenance thanks to its advanced design
- ✓ Ambient operating temperature from -20°C to +35°C
- ✓ Can be mounted on busbar or cable tray



### RERERO LENS

50 W – 115 W  
6579 lm – 16321 lm

Tempered Glass





### RERERO NG

70 W – 150 W  
8600 lm – 18000 lm

Tempered Sandy Glass

## Technical Drawing

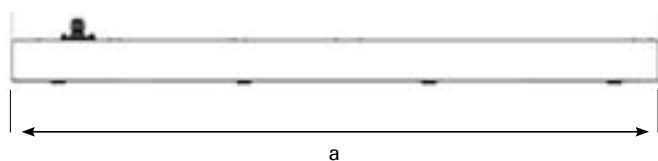


## Dimensions (mm)

	a	b	h
Standard	770	154	96,8


## Weight (kg)

Standard	6,50


## Busbar Hanger Set ( SL / DL )

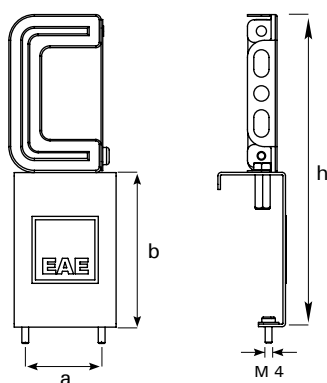

## Cable Tray Hanger Set

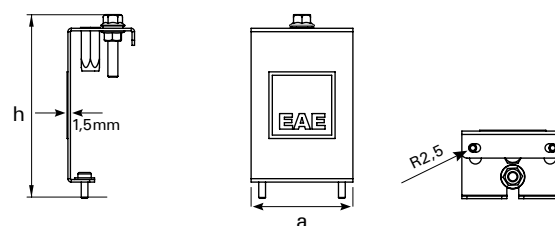

## Angular Hanger Set

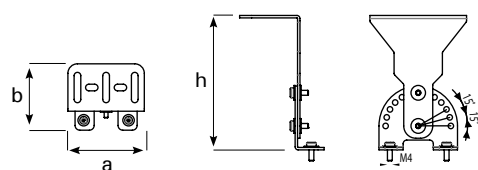

## Dimensions (mm)

	a	b	h
Busbar Hanger Set (SL/DL)	45	90	182
Cable Tray Hanger Set	60	40	107
Angular Hanger Set	47	70	109,5

# RERERO SQ

-20°C +50°C



- Logistics
- Automotive
- Machinery and Electronics
- Airport
- Glass and Ceramics
- Chemical and Plastic
- Wood and Ceramics

## Specially designed for industrial environments

- ✓ Cost effective high ceiling luminaire
- ✓ IP64 protection & IK07 impact resistance class
- ✓ Ambient operating temperature from -20°C to +50°C
- ✓ Up to 3 Hours emergency kit options / DALI Control




### RERERO SQ

70 W – 133 W  
11598 lm - 19938 lm

**OPTIC**  
Arena / Lowbay



## Technical Drawing

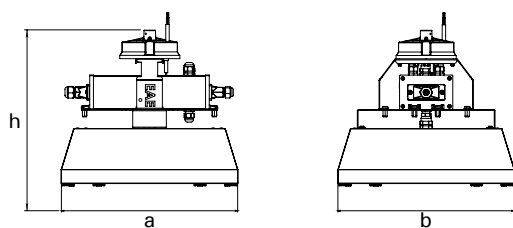


### Dimensions (mm)

	a x b	h
Standard	378,5	222
ACK Model	378,5	334


### Weight (kg)

Standard	4,90
ACK Model	6,80


## Busbar Hanger Set (SL / DL)



## Eye Bolt Hanger Set



## Cable Tray Hanger Set



### Dimensions (mm)

	a	b	h
Busbar Hanger Set (SL / DL)	55	17	92
Eye Bolt Hanger Set	-	-	62,5
Cable Tray Hanger Set	53	50	102,5



- Industrial Plants
- Aviation and Airports
- Logistics
- Sports Halls

## Optimized lighting performance for industrial plants

- ✓ High performance high bay LED luminaire
- ✓ IP65 - IP66 protection & IK10 impact resistance class / Aluminum injection housing and silk screened glass
- ✓ Ambient operating temperature from -30°C to +65°C
- ✓ Sensor option to provide smart lighting control
- ✓ Suitable luminaire for indoor and outdoor areas.
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting



### HBL IP65 Lens

88 W – 182 W  
11200 lm – 27418 lm

OPTIC  
55° / 90°

### HBL IP66 Lens

65 W – 261 W  
9295 lm – 41314 lm

OPTIC  
55° / 90°

### HBL IP66 Lens + Glass

65 W – 253 W  
8700 lm – 36400 lm

OPTIC  
55° / 90°

### HBL PRJ TK

167 W – 253 W  
22596 lm – 36400 lm

OPTIC  
55° / 90°

### HBL V6

109 W – 178 W  
17728 lm – 27865 lm


OPTIC  
60° / 90°

### HBL NG

86 W – 230 W  
33595 lm – 33596 lm

OPTIC  
55° / 90°

IP65 Lens

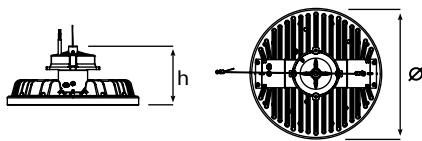


Dimensions (mm)

	$\varnothing \times h$	
IP65 Lens	315	147
IP66 Lens + Glass	315	135
IP66 Lens	315	127

Weight (kg)

IP65 Lens + Glass	4,60
IP66 Lens + Glass	5,50
IP66 Lens	6,50


IP66 Lens + Glass

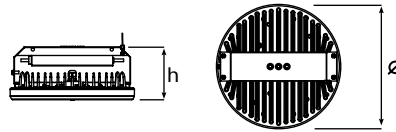


Dimensions (mm)

	a	b	h
Busbar Hanger Set (SL/DL)	55	17	92
Single Eye Bolt Hanger Set	-	-	50,5
Cable Tray Hanger Set	60	54,5	80
Cable Tray EMG Kit Hanger Set	69	54,5	103
Double Eye Bolt Hanger Set	-	-	50,5
Double Eye Bolt Hanger Set for EMG Luminaires	78	45	59,5
HBL IP65 Eye Bolt Hanger Set	-	-	62,5
HBL IP65 Tray Hanger Set	-	-	103
HBL IP65 Busbar Hanger Set (SL/DL)	-	-	92


IP66 Lens

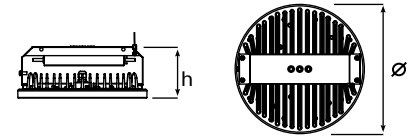


Busbar Hanger Set ( SL / DL )




Single Eye Bolt Hanger Set




HBL IP65 Eye Bolt Hanger Set




Cable Tray Hanger Set




Cable Tray EMG Kit Hanger Set




HBL IP65 Busbar Hanger Set (SL / DL)




Double Eye Bolt Hanger Set



Double Eye Bolt Hanger Set for EMG Luminaires



HBL IP65 Cable Tray Hanger Set



Optional Version With Terminal Box





- Industry Areas
- Sports Halls
- Shopping Centers

## Functional and efficient lighting

- ✓ High performance high-ceiling LED fixture
- ✓ IP66 protection & IK05 - IK10 impact resistance class
- ✓ Ambient operation temperature from -20°C to +60°C
- ✓ One-to-one exchange up 400W HIT
- ✓ Option for glass cover
- ✓ Various optics options
- ✓ Variable hanger set options according to using area
- ✓ Sensor option to provide smart lighting control
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting



### HBC Lens

79 W – 220 W  
9860 lm – 26980 lm

OPTIC  
60° / 90°



### HBC Lens + Glass

75 W – 220 W  
8957 lm – 24600 lm

OPTIC  
60° / 90°



### HBC Lens + EMG Kit

79 W – 206 W  
9860 lm – 25800 lm

OPTIC  
60° / 90°




### HBC Lens + Glass + EMG Kit

79 W – 155 W  
8957 lm – 18616 lm

OPTIC  
60° / 90°


## Technical Drawing | Lens

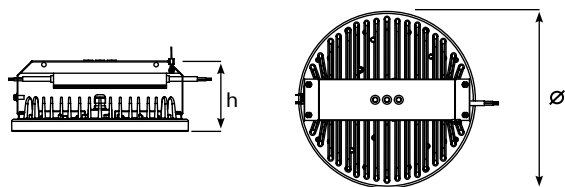

### Dimensions (mm)

	Ø x h
Lens	315 x 127
Lens + EMG Kit Module	315 x 162


## Technical Drawing | Lens + EMG Kit Module

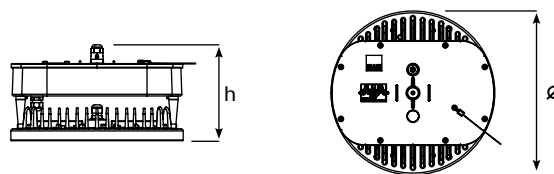


### Weight (kg)

Lens	4,00
Lens + EMG Kit Module	6,00


## Busbar Hanger Set ( SL / DL )




## Single Eye Bolt Hanger Set




## Cable Tray Hanger Set




## Cable Tray EMG Luminaire Hanger Set



## Double Eye Bolt Hanger Set



## Double Eye Bolt EMG Luminaire Hanger Set



### Dimensions (mm)

	a	b	h
Busbar Hanger Set (SL/DL)	55	17	92
Single Eye Bolt Hanger Set	-	-	50,5
Cable Tray Hanger Set	60	54,5	80
Cable Tray EMG Luminaire Hanger Set	69	54,5	103
Double Eye Bolt Hanger Set	-	-	50,5
Double Eye Bolt Hanger Set for EMG Luminaire	78	45	59,5

# VALERIA



- Open Spaces
- Ports
- Sports Halls
- Industrial Plants
- Parking Lots
- Advertising Boards
- Building Facades

-20°C +40°C



## Perfect solution for lighting needs of large areas

- ✓ The ideal solution for outdoor lighting
- ✓ IP66 protection & IK08 impact resistance class
- ✓ Ambient operating temperature from -20°C to +40°C
- ✓ DALI control option




### VALERIA

46 W – 292 W  
5730 lm - 37938 lm

**OPTIC**  
AS / 15° / 20° / 30° /  
40° / 60° / 90°

## Technical Drawing

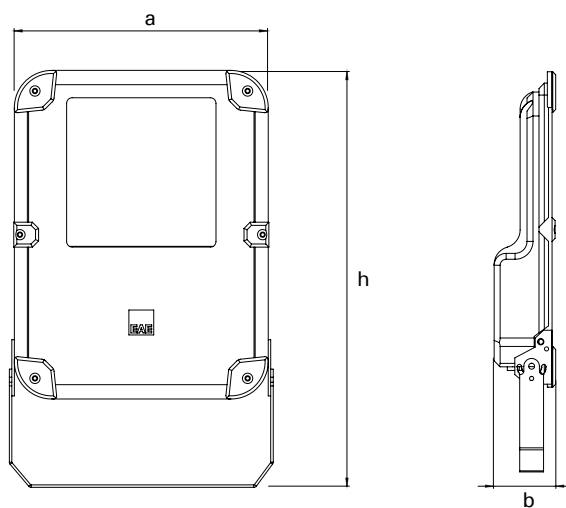

### Weight (kg)

46W	1,65
100W	2,99
144W	4,35
193W	4,35
292W	6,85

### Dimensions (mm)

	a	h	b
46W	320	205	47
100W	370	342	55
144W	400	320	55
193W	425	345	55
292W	485	395	65

# PROLIT KOMPAKT



- Logistics
- Shipyards
- Tanker Filling and Unloading Areas
- Oil Refineries
- Onshore Facilities
- Ship and Shipbuilding
- Aircraft Hangars

-30°C +55°C



## Compact lighting solution for many applications

- ✓ Efficient alternative to conventional lighting floodlights
- ✓ Ambient operating temperature from -30°C to +55°C
- ✓ IP66 protection & IK08 impact resistance class
- ✓ Save up to 53% or 70% energy with DALI control
- ✓ Special housing adaptations for Tunnel / Marine Prolit Tunnel / Prolit Ship.




### PROLIT KOMPAKT V3 / NG / MP

30 W – 124 W  
4000 lm – 14400 lm

**OPTIC**  
16° / 18° / 22° / 23° / 27° /  
35° / 46° / 52° / 60° / 90° /  
98° / 99° / AS /  
Sport lens / 0 Tilt



## Technical Drawing

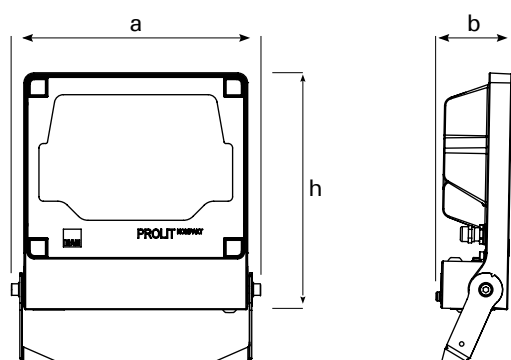


## Dimensions (mm)

	a	b	h
Standard	276	76	330

## Weight (kg)

Standard	3,60

## Pipe Fitting Hanger Set

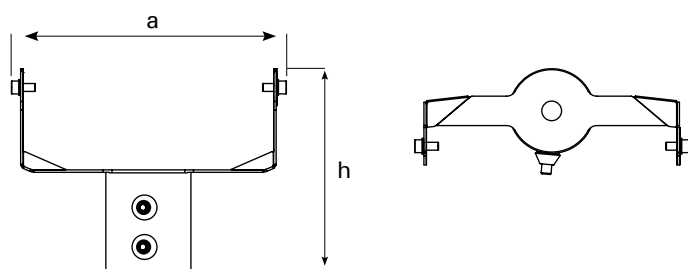

## Dimensions (mm)

	a	h
Pipe Fitting Hanger Set	277	205

## Optional Version With Terminal Box





- Open Spaces
- Ports
- Sports Halls
- Industrial Plants
- Parking Lots
- Advertising Boards
- Building Facades

## Ultra-high performance luminaire for floodlight applications

- ✓ Ultra high power LED floodlight
- ✓ IP66 protection & IK09 impact resistance class
- ✓ Ambient operating temperature from -30°C to +60°C
- ✓ Excellent floodlight for 1:1 replacement up to 400 W HIT
- ✓ Energy savings of up to from 65% to 80%.
- ✓ Special housing adaptation for tunnel / ship applications
- ✓ DALI / DIMKO / 1-10V / RF control options



### PROLIT NG / MP

94 W – 230 W  
12494 lm – 28306 lm

**OPTIC**  
10° / 99° / AS / Sport lens /  
0 Tilt




### PROLIT SHIP

101 W – 206 W  
13400 lm – 25800 lm

**OPTIC**  
10° / 99° / AS / Sport lens /  
0 Tilt

## Technical Drawing

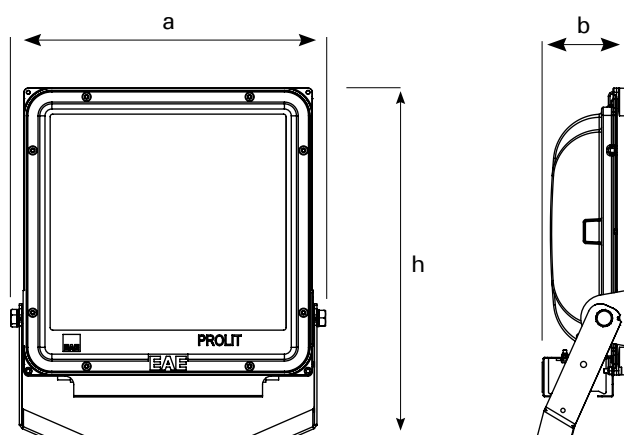


### Dimensions (mm)

	a	b	h
Standard	336	95	412

### Weight (kg)

Standard	7,10
----------	------


## Pipe Fitting Hanger Set

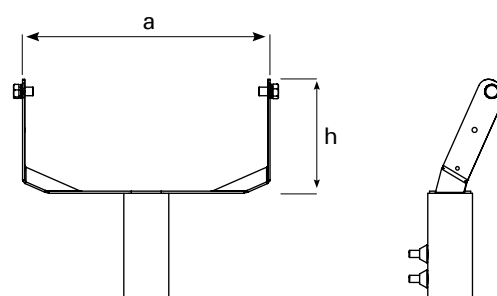

### Dimensions (mm)

	a	h
Pipe Fitting Hanger Set	345	310
Single Point Hanger Set	345	345

## Single Point Hanger Set

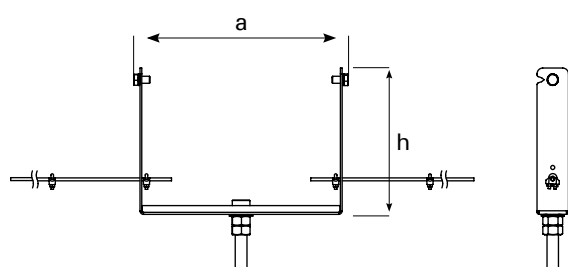

# PROLIT PLUS



- General Open Spaces
- Ports
- Sports Halls
- Industrial Plants
- Parking Lots
- Building Facades

-30°C +55°C



## Lighting solution in large areas

- ✓ Special housing adaptation for Port / Apron / Tunnel
- ✓ IP66 protection & IK09 impact resistance class / Tempered screen printing glass
- ✓ Ambient operation temperature from -30°C to +55°C
- ✓ DALI / 1-10V / DIMKO / RF control options




### PROLIT PLUS

195 W – 435 W  
25300 lm – 58706 lm


#### OPTIC

16° / 18° / 23° / 27° / 30° / 35° / 45° /  
46° / 52° / 60° / 90° / 98° / AS /  
Spot lens / 0 Tilt


## Technical Drawing

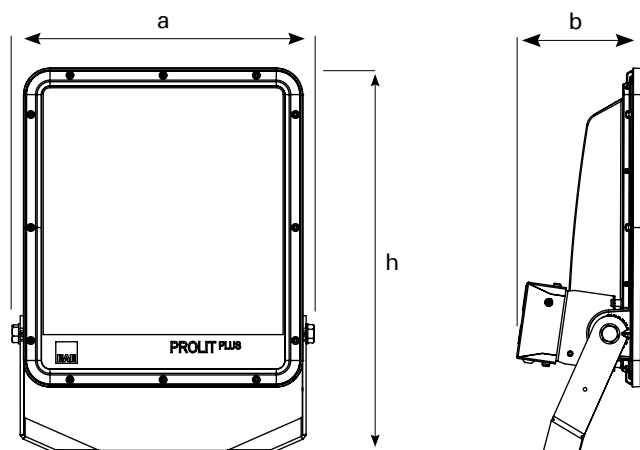


## Corner Hanger Set

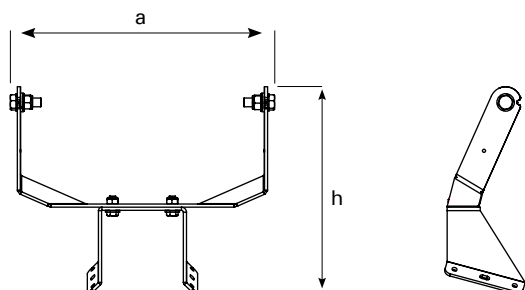


## Easy Assembly Bracket

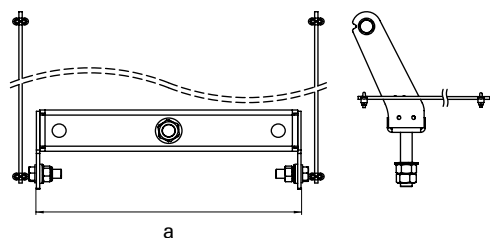

## Adjustable Suspension Set 1x



## Adjustable Suspension Set

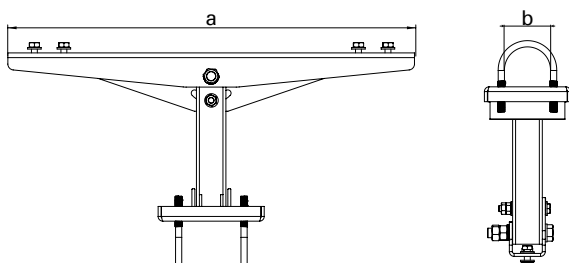

## Dimensions (mm)

	a	b	h
Standard	424	174	537




## Weight (kg)

Standard	11,50
----------	-------


## Dimensions (mm)

	a	b	h
Corner Hanger Set	422	-	331
Easy Assembly Bracket	399	-	-
4 Piece Single Angle Hanger Set	870	-	-
Adjustable Suspension Set 1x	-	-	286
Double Pipe Hanger Set	-	-	600
Vertical Pipe Hanger Set	220	-	160
Adjustable Suspension Set	690	78	-


## 4 Piece Single Angle Hanger Set

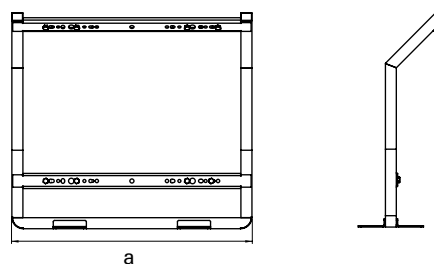

## Double Pipe Hanger Set



## Vertical Pipe Hanger Set

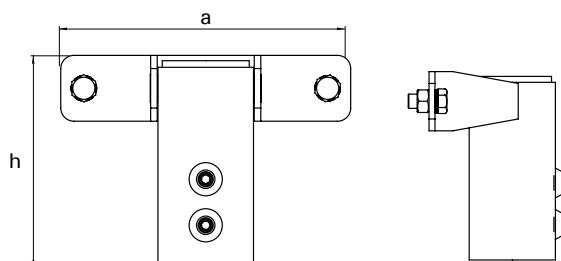

# PROLIT

## Plus Apron



■ Airports

-30°C +50°C



## Designed for airport runways

- ✓ Metallized plastic reflector
- ✓ IP66 protection & IK10 impact resistance class
- ✓ Ambient operation temperature from -30°C to +50°C
- ✓ Asymmetric optics specially developed for airports
- ✓ DALI / 1-10V / DIMKO / RF control options



### PROLIT Plus Apron Single

211 W – 354 W  
24481 lm – 41391 lm

**OPTIC**  
Special Lens for Apron Areas




### PROLIT Plus Apron Double

422 W – 708 W  
49682 lm – 82782 lm

**OPTIC**  
Special Lens for Apron Areas

## Technical Drawing

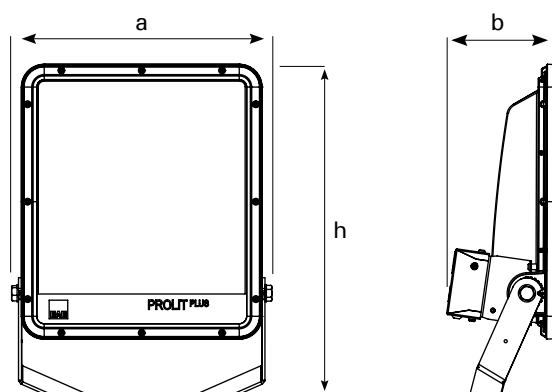



## Dimensions (mm)

	a	b	h
Single	424	537	171
Double	824	525	173

## Weight (kg)

Single	12,50
Double	25,00

## Technical Drawing

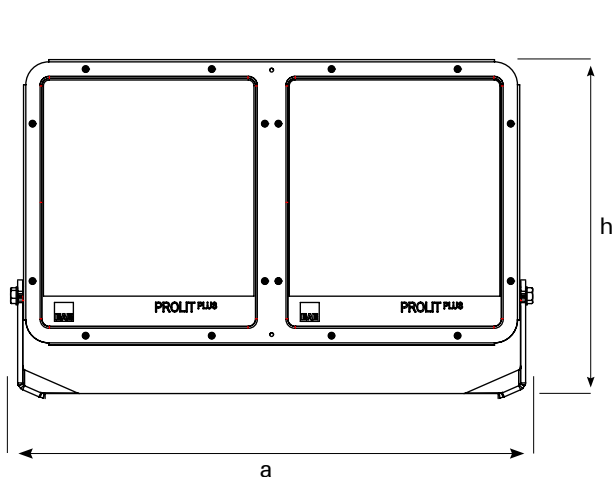

# PROLIT EFFECT

-30°C +55°C



- Shipyards
- Ports
- Ship and Shipbuilding
- Aircraft Hangars
- Square Lighting

## The lightest and most efficient floodlight on the global market

- ✓ Durable facade and area luminaire
- ✓ IP66 protection & IK09 impact resistance class / Tempered and screen printed glass diffuser
- ✓ Ambient operating temperature from -30°C to +55°C
- ✓ DALI control option



### PROLIT MP

436 W – 845 W  
60000 lm – 99700 lm

#### OPTIC

18° / 23° / 30° / 46° / 60° /  
90° / 0 Tilt



### PROLIT NG


428 W – 753 W  
56421 lm – 92305 lm

#### OPTIC

10° / 16° / 27° / 54° / 98° /  
AS / 0 Tilt



## Technical Drawing

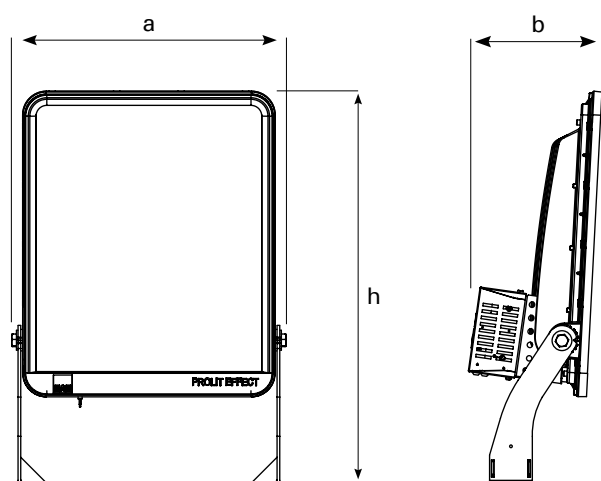


## Dimensions (mm)

	a	b	h
Single	512	270	731

## Weight (kg)

Standard	18,80
----------	-------

## Hanger Set

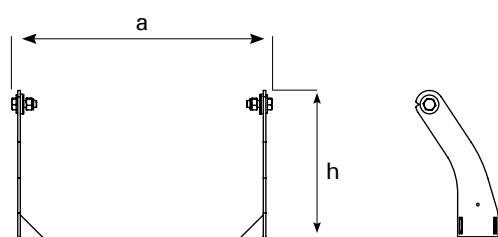

## Dimensions (mm)

	a	h
Hanger Set	295	487

# MFL

-30°C +55°C



## Extra innovative floodlight designed for marine applications

- ✓ High-performance LED luminaire
- ✓ Special coating resistant to marine paints
- ✓ IP66 protection & IK10 impact resistance class
- ✓ Ambient operating temperature from -30°C to +55°C
- ✓ DALI control option

- Shipyards
- Ports
- Ship
- Passenger Ship Facades




**MFL**

65 W – 164 W  
9295 lm – 24364 lm

Mid Power LED

**OPTIC**  
55° / 90°

## Technical Drawing

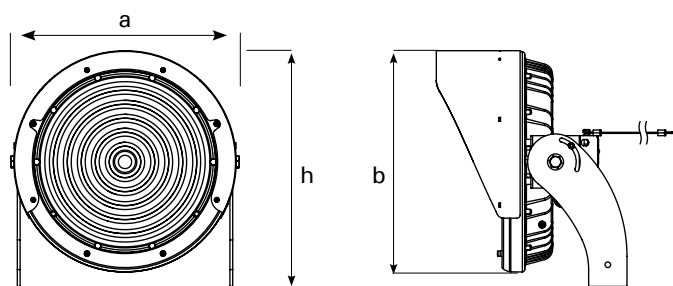


## Dimensions (mm)

	a	b	h
Single	327	316	344

## Weight (kg)

Standard	8,10

## Hanger Set

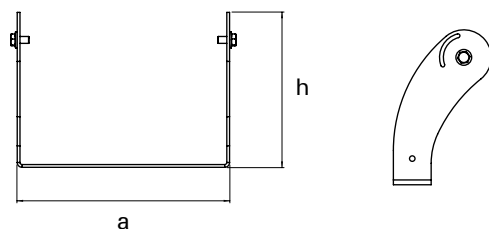

## Dimensions (mm)

	a	h
Hanger Set	308	225

# GPRONA

-25°C +50°C



- Shipyard
- Ports
- Ship and Shipbuilding
- Aircraft Hangars
- Passenger Ship Facades

## The Best Choice of Asymmetric Viewpoint

- ✓ LED luminaire, which is suitable for heavy industrial and port conditions
- ✓ IP66 protection & IK09 impact resistance class / Tempered glass
- ✓ Ambient operation temperature from -25°C to +50°C
- ✓ Perfect solution in the port sites with special asymmetric curve
- ✓ Multi-directional control and automation with DALI, RF, 1-10V and DIMKO options
- ✓ Suitable for special site solutions for special projects
- ✓ High strength against vibrations



### GPRONA

135 W – 463 W  
21440 lm – 74200 lm

DALI / RF / 1-10V / DIMKO



### GPRONA PLUS

558 W – 669 W  
87538 lm – 102604 lm

DALI / RF / 1-10V / DIMKO




### GPRONA MINI

133 W – 185 W  
21800 lm – 29400 lm

DALI / RF / 1-10V / DIMKO

*The values specified above represent the minimum and maximum ranges for all variations of the product.  
To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*


## Technical Drawing

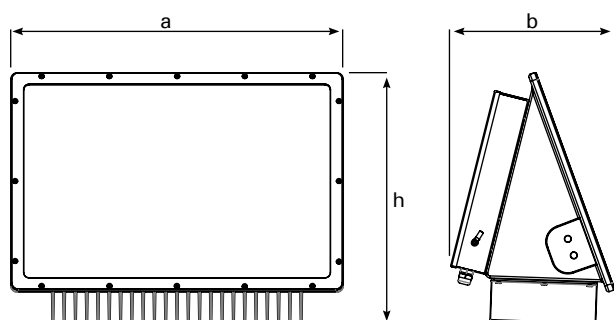


## Weight (kg)

Gprona	22,00 - 31,50
Gprona Plus	33,50
Gprona Mini	11,80 - 12,30

## Angular Hanger Set

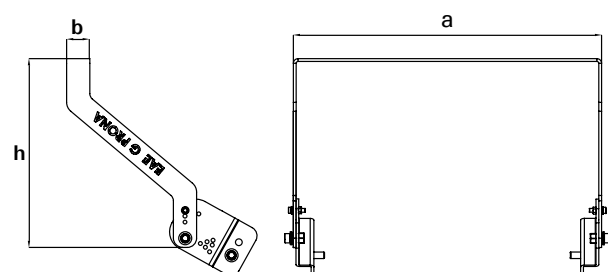

## Easy Assembly Hanger Set

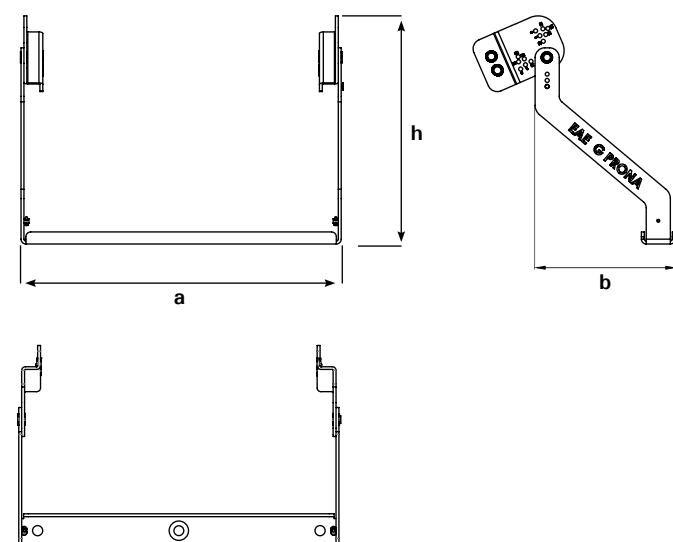

## Dimensions (mm)

	a	b	h
Gprona Standard Injection Box	589	296	508
Gprona Standard Luxeon Led	589	317	446
Gprona 10V + RF Injection Box	589	296	529
Gprona 10V + RF Luxeon Led	589	403	446
Gprona DALI + ZHAGA Injection Box	589	296	508
Gprona DALI + ZHAGA Luxeon Led	589	340	446


## Dimensions (mm)

	a	b	h
Gprona Plus Standard	698	297	493
Gprona Plus 10V + RF	698	297	513
Gprona Plus DALI + ZHAGA	698	297	492

## Dimensions (mm)

	a	b	h
Gprona Mini Standard	374	276	419
Gprona Mini 10V + RF	375	273	483
Gprona Mini DALI + ZHAGA	375	273	445

## U Type Short Hanger Set

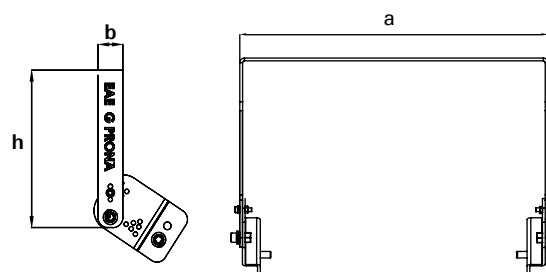

## Dimensions (mm)

	a	b	h
Angular Hanger Set	662	50	406
U Type Short Hanger Set	662	50	306
Easy Assembly Hanger Set	662	290	472

# SPRONA

-25°C +45°C

CE

IP66


LED



- Shipyard
- Ports
- Ship and Shipbuilding
- Aircraft Hangars
- Passenger Ship Facades

## Maximum performance for extreme conditions

- ✓ Aluminium housing with high mechanical strength
- ✓ IP66 protection & IK07 impact resistance class / Tempered transparent glass
- ✓ Ambient operating temperature from -25°C to +45°C
- ✓ Optimized, single, dual and triple modular use
- ✓ Functional use in the port and outdoor applications with special Hanger Set




**SPRONA**

348 W  
49527 lm – 51506 lm

**OPTIC**  
20° / 35° / 60°

## Technical Drawing

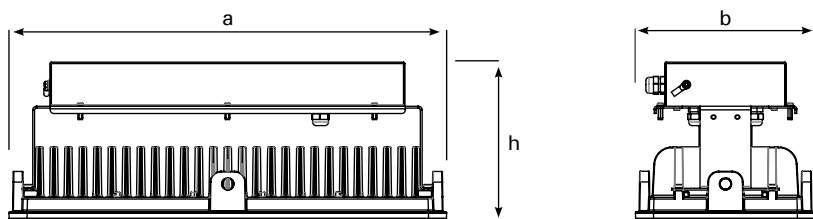


### Dimensions (mm)

	a	b	h
Single Module	605	249	220
Double Module	605	615	220
Triple Module	605	980	220


### Weight (kg)

Single Module	15,40
Double Module	41,00
Triple Module	65,00


### Single Hanger Set

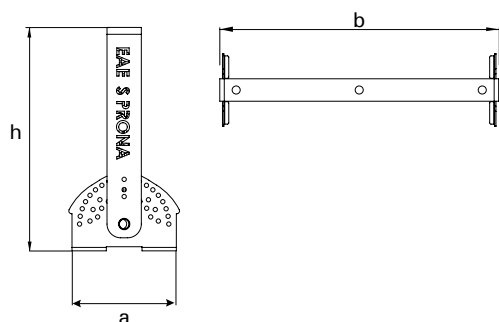

### Double Hanger Set

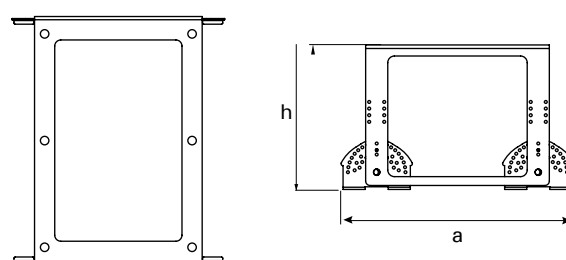

### Triple Hanger Set

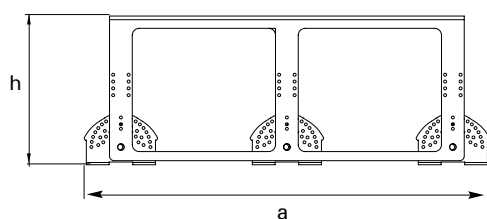

### Dimensions (mm)

	a	b	h
Singer Hanger Set	249	616	345
Double Hanger Set	615	-	345
Triple Hanger Set	980	-	345

# SPRONA PLUS



- Shipyard
- Ports
- Ship and Shipbuilding
- Aircraft Hangars

-25°C +50°C



## Maximum performance in harsh conditions

- ✓ Aluminium housing with high mechanical strength
- ✓ IP66 protection & IK08 impact resistance class / Tempered transparent glass
- ✓ Ambient operating temperature from -25°C to +50°C
- ✓ Functional use in the port and outdoor applications with special hanger set




### SPRONA PLUS

851 W – 1051 W  
116026 lm – 149147 lm

**OPTIC**  
10° / 22° / 57°



## Technical Drawing

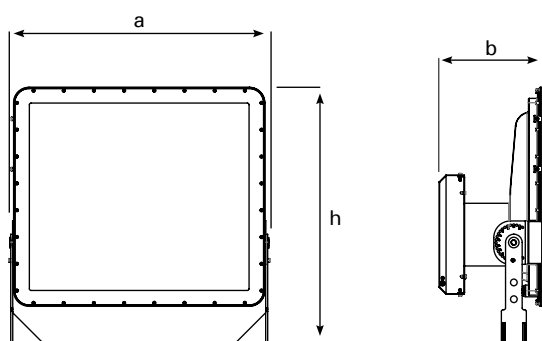


## Dimensions (mm)

	a	b	h
Standard	805	228	768

## Weight (kg)

Standard	45,80

## Hanger Set

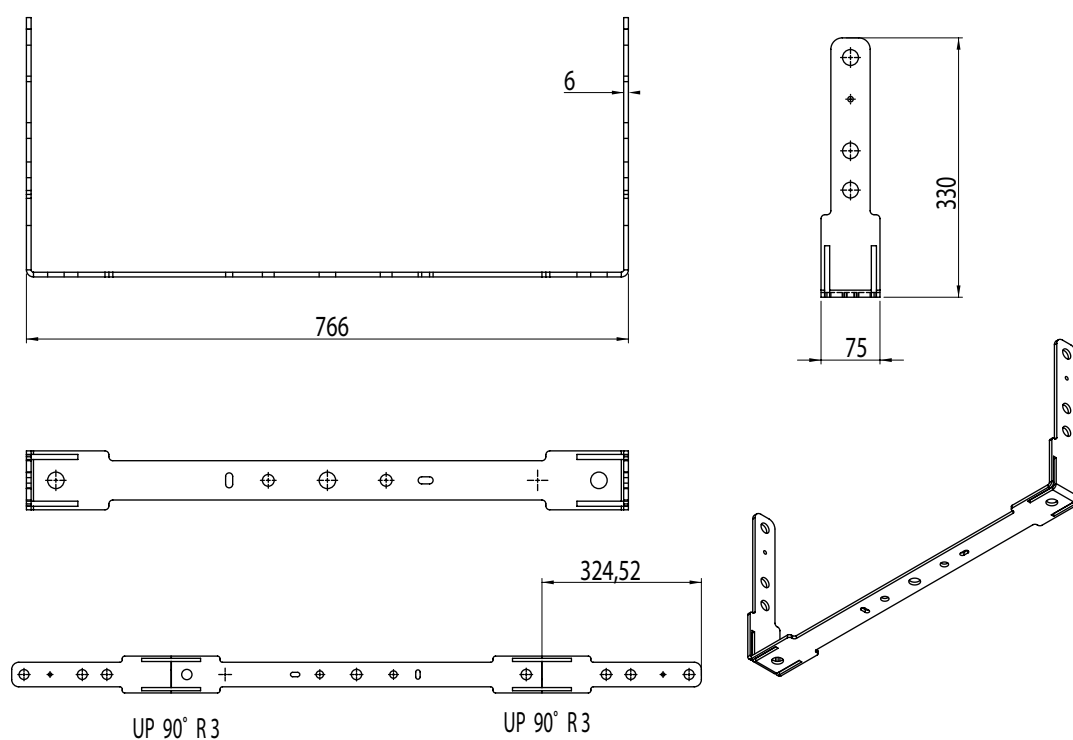

# KANOLED

-30°C +50°C



## LED Luminaire for Fuel Stations

- ✓ Excellent performance for flammable and combustible areas
- ✓ IP65 - IP66 protection & IK07 impact resistance class
- ✓ Ambient operating temperature from -30°C to +50°C (IP65) / -20°C to +50°C (IP66)
- ✓ One-to-one exchange up 250W HIT

- Oil Refineries
- Tanker Filling and Unloading Areas



### KANOLED V.3 IP65

46 W – 133 W  
6600 lm - 15310 lm

Tempered Glass - Glazed Glass

**OPTIC**  
Wide Angle / 115°

Wiring Option




### KANOLED V.3 HE


60 W – 100 W  
9700 lm - 14415 lm

Transparent Glass

## Technical Drawing IP65

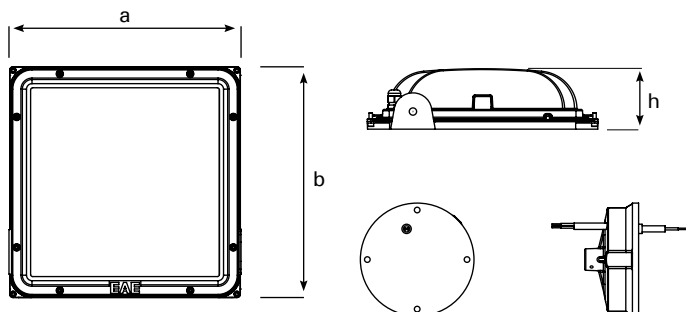

## Technical Drawing IP66

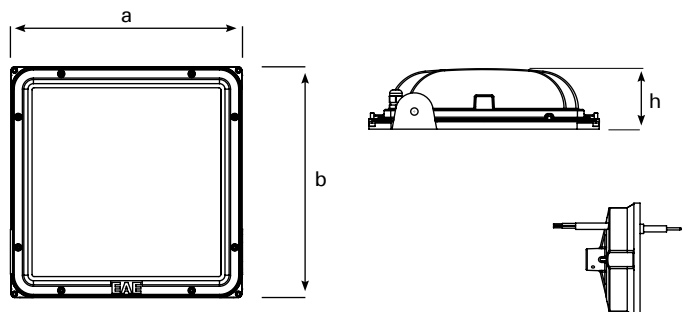


### Dimensions (mm)

	a	b	h
Standard IP65 / IP66	336	336	89


### Weight (kg)

Standard	5,00
----------	------


## External EMG Kit Box Standard

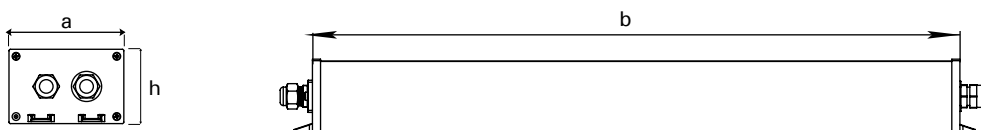

## External EMG Kit Box DALI

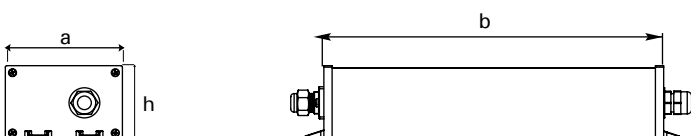

## U Hanger Set

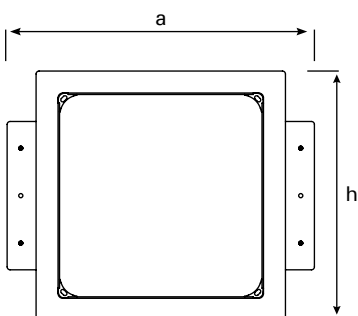

### Dimensions (mm)

	a	b	h
External ACK Box	114	673	74
External ACK Box DALI	114	363	74
Metal Hanger Set	517,5	92,5	420

# RA / RA2 / RA3 / RA CLASS II

-40°C +60°C



## Powerful street and road lighting

- City and Residential Streets
- Bridges
- Bicycle and Pedestrian Paths
- Squares
- Parking Lots
- Perimeter Lighting
- Roads and Highways

- ✓ Powerful LED mast top luminaire
- ✓ IP66 protection & IK09 impact resistance class
- ✓ Ambient operating temperature from -40°C to +60°C
- ✓ Optional insulation protect class ( Class I & Class II )
- ✓ Intelligent lighting control system via DIMKO, NEMA, Zhaga and RF



### RA

25 W – 58 W  
3558 lm – 7962 lm

#### OPTIC

100° / 110° / Wide Angle / Extra Wide Angle

RF Wireless and DALI /1-10V  
Dimko / Nema / Zhaga  
control options

### RA 2

30 W – 116 W  
3637 lm – 16906 lm

#### OPTIC

100° / 110° / Wide Angle / Extra Wide Angle

RF Wireless and DALI /1-10V  
Dimko / Nema / Zhaga  
control options

### RA 3

103 W – 218 W  
15300 lm – 27700 lm

#### OPTIC

100° / 110° / Wide Angle / Extra Wide Angle

RF Wireless and DALI /1-10V  
Dimko / Nema / Zhaga  
control options

### RA CLASS II

30 W – 46 W  
4300 lm – 6580 lm

#### OPTIC


100° / 110° / Wide Angle / Extra Wide Angle

RF Wireless and DALI /1-10V  
Dimko / Nema / Zhaga  
control options

*The values specified above represent the minimum and maximum ranges for all variations of the product.*

*To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*

## Technical Drawing

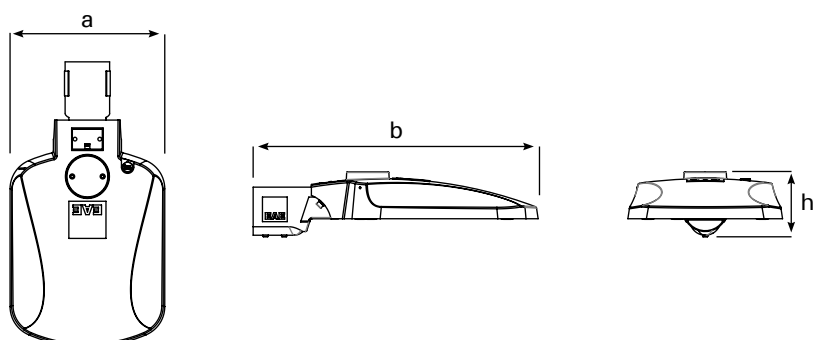

### Dimensions (mm)

	a	b	h
<b>Ra</b>	250	460	105
<b>Ra2</b>	310	639	104
<b>Ra3</b>	310	705	104
<b>Ra Class II</b>	460	250	68

### Weight (kg)

<b>Ra</b>	3,40
<b>Ra2</b>	6,70
<b>Ra3</b>	8,30
<b>Ra Class II</b>	3,30

# HORUS 1-2

-20°C +35°C



- Street and Environment
- Ports
- Highways
- Shipyards
- Open Spaces
- Urban Areas

## Modern, highly efficient street and perimeter lighting

- ✓ Highly durable LED luminaire for street lighting
- ✓ High mechanical resistance housing with IP66 and IK08 resistance and tempered transparent glass
- ✓ -20°C / +35°C ambient operating temperature
- ✓ DALI /1-10V + Dimko options
- ✓ Driver and led intervention sections separated



### HORUS-1

79 W – 123 W  
10200 lm – 13500 lm

Mid Power LED

**OPTIC**  
100°




### HORUS-2

117 W – 195 W  
15700 lm – 23044 lm

Mid Power LED

**OPTIC**  
100°

## Technical Drawing

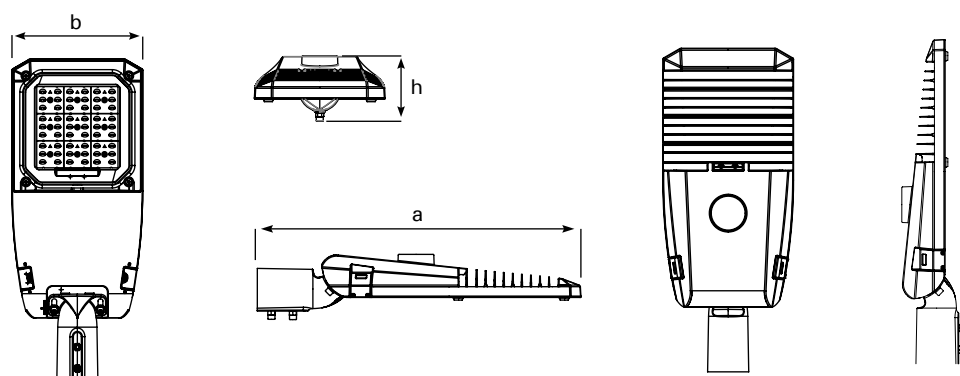

### Dimensions (mm)

	a	b	h
Horus 1	601	243	120
Horus 2	721	313	120

### Weight (kg)

Horus 1	3,50
Horus 2	5,10

# OSIRIS

-20°C +40°C



- Street and Environment
- Ports
- Highways
- Shipyards
- Open Spaces
- Urban Areas

## High performance street luminaire

- ✓ Luminaire suitable for M1 and all other road classes
- ✓ IP66 protection & IK09 impact resistance class / Tempered transparent glass
- ✓ Ambient operating temperature from -20°C to +40°C
- ✓ Quick and easy installation
- ✓ High energy savings
- ✓ DALI control option
- ✓ Clamshell driver for easy replacement




**OSIRIS**

237 W – 375 W  
30430 lm – 48352 lm

**OPTIC**  
Mid Power LED  
100°



## Technical Drawing

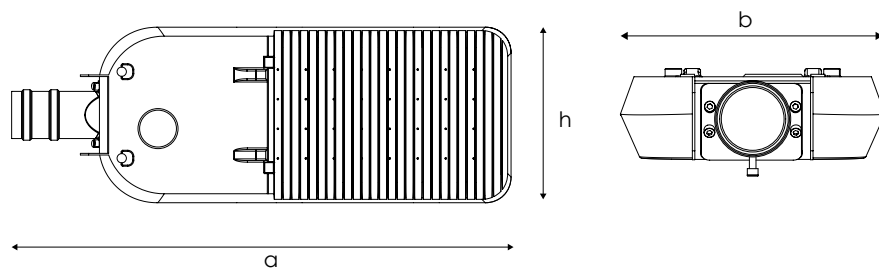

## Dimensions (mm)

	a	b	h
Standard	910	320	112

## Weight (kg)

Standard	10,50
----------	-------

# ARKTOS

## NG V2

-40°C +50°C



- Street and Environment
- Ports
- Highways
- Shipyards
- Open Spaces
- Urban Areas

## Perimeter lighting with excellent performance

- ✓ Streetlight LED luminaire
- ✓ Aluminium injection monobloc housing
- ✓ Ambient operating temperature from -40°C to +50°C
- ✓ IP66 protection & IK09 impact resistance class / Tempered transparent glass
- ✓ High energy saving and long lasting use
- ✓ Environmentally friendly lighting with zero mercury




### ARKTOS

55 W – 142 W  
7100 lm – 15656 lm

Mid Power LED

**OPTIC**  
110°

## Technical Drawing

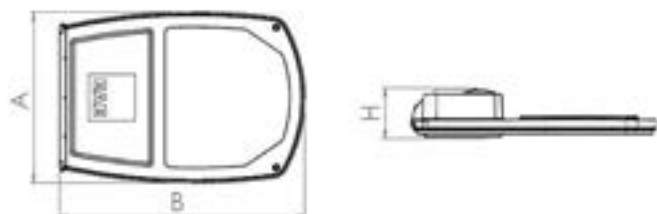


### Dimensions (mm)

	a	b	h
Standard	330	475	92,5

### Weight (kg)

Standard	6,00
----------	------

## Hanger Set

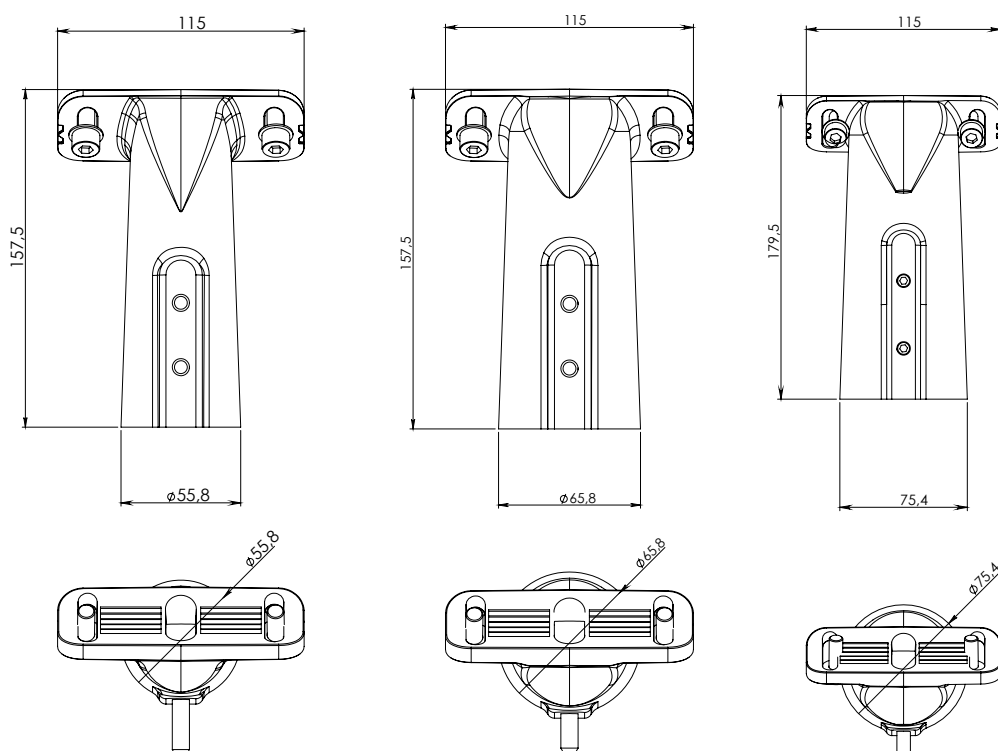

# INFINOO

-20°C +50°C



- Logistics
- Data Centers
- Textile
- Retail and Presentation
- Office and Communication
- Education and Science
- Art & Culturer

## Endless applications for the perfect lighting experience

- ✓ LED linear duct system: Energy transmission, lighting control and more... All in one solution.
- ✓ IP20 - IP40 - IP64 protection & IK02 impact resistance class
- ✓ Ambient operating temperature from -20°C to +50°C
- ✓ Simple, fast and tool-free installation
- ✓ UGR < 19 option
- ✓ Number of conductors from 5 to 11
- ✓ Aluminium housing



### INFINOO IP20 / IP 40

20 W – 197 W  
3200 lm – 25583 lm

#### OPTIC

30° / 60° / 90° / Asymmetric /  
Double Asymmetric



### INFINOO IP64

20 W – 197 W  
3200 lm – 25583 lm

#### OPTIC

30° / 60° / 90° / Asymmetric /  
Double Asymmetric



### INFINOO DUO

93 W – 192 W  
15744 lm – 27709 lm

#### OPTIC

30° / 60° / 90° / Asymmetric /  
Double Asymmetric



## INFINOO UGR19

21 W – 43 W  
3000 lm – 6733 lm

OPTIC  
70°

# INFINOO UGR19

is ideal for offices, schools, and meeting rooms. Equipped with state-of-the-art LED technology, this luminaire delivers the best features of linear lighting systems, offering energy efficiency, long-lasting performance, and an eco-friendly, economical solution.

Designed with a UGR value below 19, it minimizes glare for superior visual comfort. With both surface and suspended mounting options, it easily adapts to various architectural and aesthetic requirements, empowering designers and architects to create versatile lighting solutions.



## INFINOO OPAL IP20 & IP40

36 W – 98 W  
4439 lm – 11156 lm

Opal Diffuser



## INFINOO OPAL IP64

25 W – 106 W  
2800 lm – 12051 lm

Opal Diffuser



## INFINOO TRACK

Three Phase Track Rail for  
INFINOOLINE



## INFINOO SENSOR

Sensor unit  
compatible with INFINOOLINE  
channel duct




## INFINOO EXIT

Emergency guidance unit  
Suitable for INFINOOLINE  
channel duct




## INFINOO COVER

Compatible with  
metal or PC covers  
INFINOO channel duct.

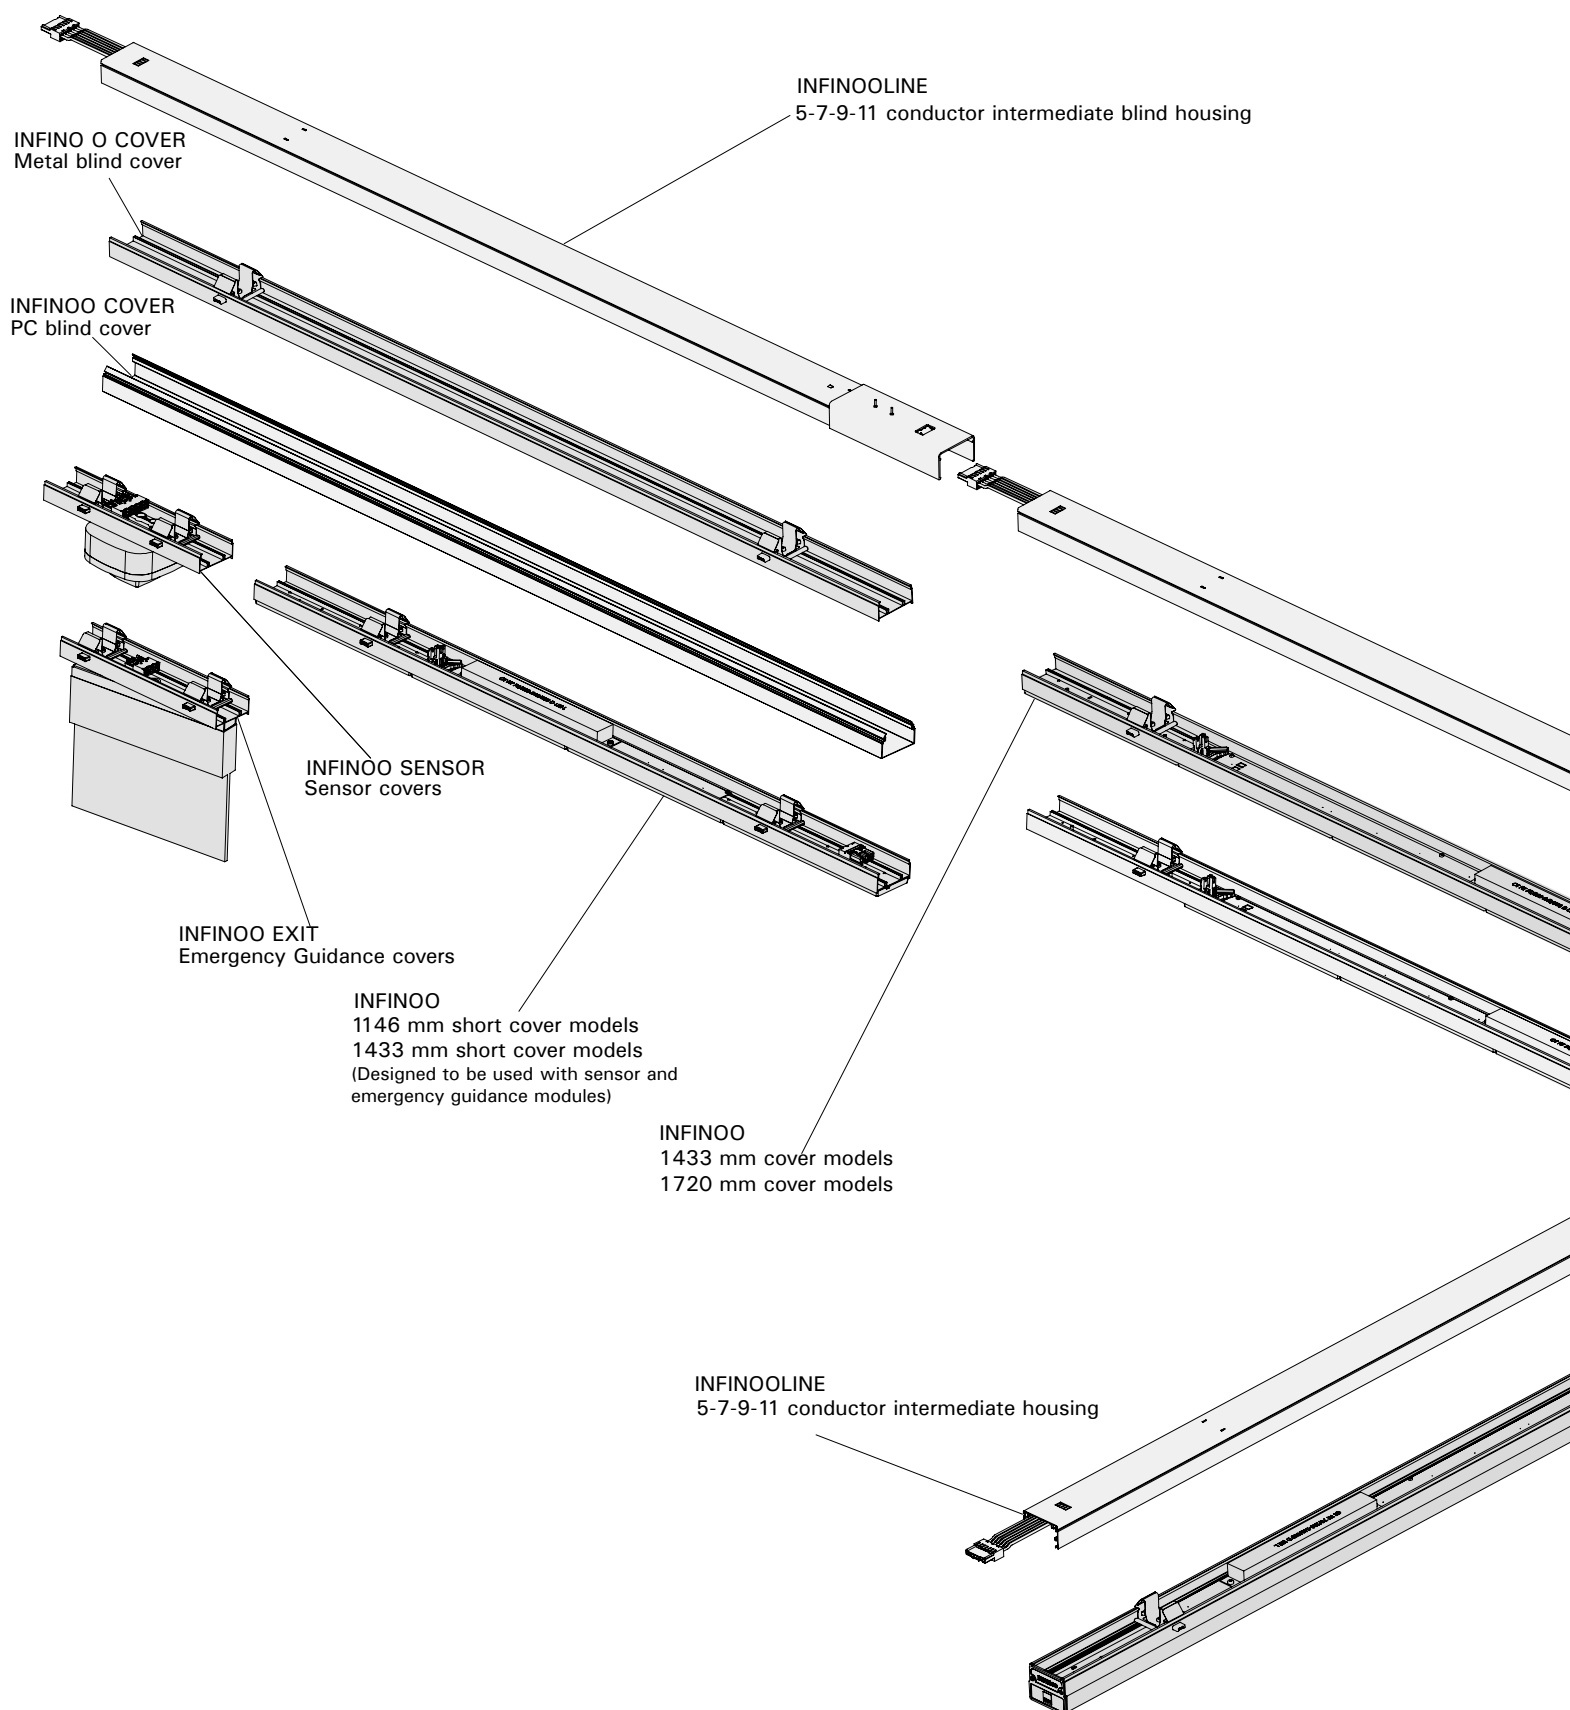


*The values specified above represent the minimum and maximum ranges for all variations of the product.  
To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*


## Hanger Set



STEEL FIBRE-REINFORCED CONCRETE SUSPENSION SET




STEEL FIBRE-CABLE TRAY SUSPENSION SET




CHAIN CONCRETE SUSPENSION SET




CHAIN CONCRETE CABLE TRAY SUSPENSION SET




ROD-WIRE CABLE TRAY SUSPENSION SET



ROD-CONCRETE SUSPENSION SET



SUPPORT SPRING CABLE TRAY INSTALLATION TOOL



SUPPORT SPRING CONCRETE INSTALLATION TOOL

INFINOOLINE  
5-7-9-11 conductive  
intermediate housing

INFINOO RAY  
Three-phase track 1433mm cover models  
Three-phase track 1720mm cover models

X turning

T turning

L turning

INFINOO DUO

# M-LINE

-20°C +40°C



- Logistics
- Education and Science
- Complex
- Shops and Markets
- Office and Administrative Buildings

## Cost-effective alternative for endless lighting applications

- ✓ High performance surface-mounted modular lighting LED luminaire
- ✓ IP40 protection & IK02 impact resistance class
- ✓ Ambient operating temperature from -20°C to +40°C
- ✓ Opal diffuser option
- ✓ Surface-mounted modular lighting
- ✓ Different housing sizes according to the area of use
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting



### M-LINE


11 W – 75 W  
1540 lm – 10240 lm

**OPTIC**  
30° / 60° / 90° /  
Double Asymmetric / Batwing


*The values specified above represent the minimum and maximum ranges for all variations of the product.  
To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*




## Technical Drawing

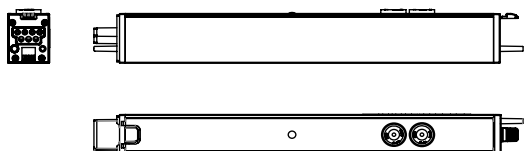


### Central Feeder Box Module

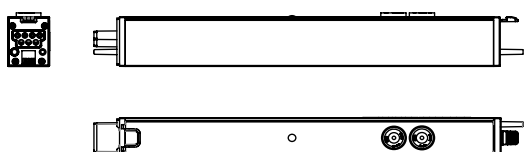


### Starting Feeder Module

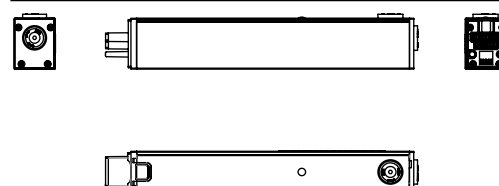

### Intermediate Module

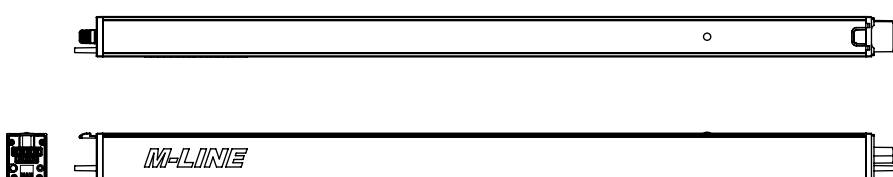


### End Closer Module



### Weight (kg) (short height)

Single Module	1,25
Blank Module	0,90
Intermediate Module	1,35
Center Feed Module	0,46
Feeder Module	0,35
Termination Module	0,10

### Support Kits

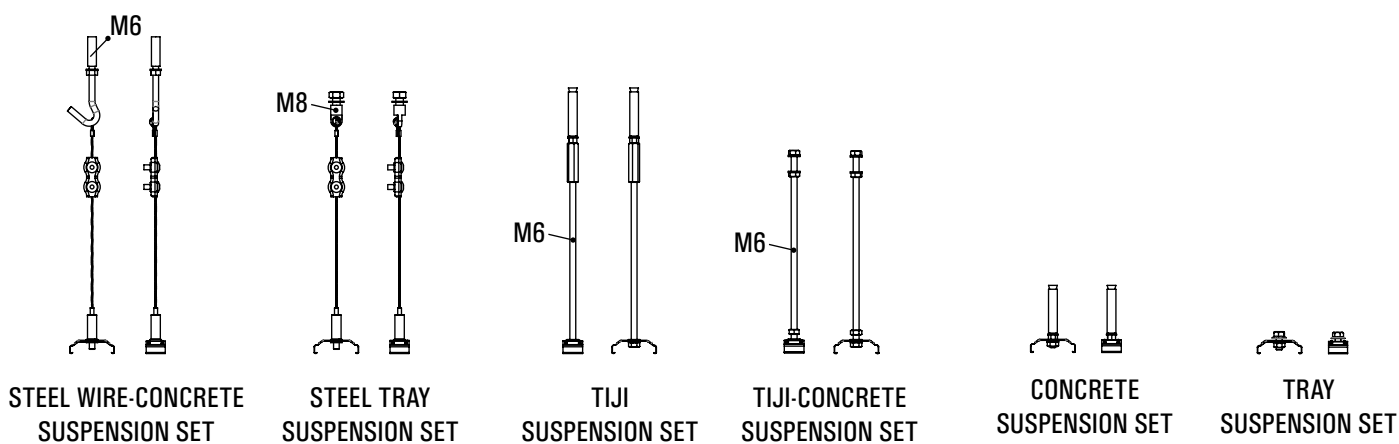

# GALIS MEGA

-25°C +40°C



- Logistic Plants
- Education and Science Buildings
- Mixed Buildings
- Shops and Markets
- Office and Administrative Buildings

## The ideal solution for flexible use

- ✓ High performance etange LED lighting fixture
- ✓ Maximum energy saving
- ✓ IP65 protection & IK09 impact resistance class / Aluminum extruded housing
- ✓ Ambient operating temperature from -25°C to +40°C
- ✓ Flexible mounting with movable mounting spring
- ✓ Quick and easy electrical connection with cable gland
- ✓ Up to 3 hours emergency kit option / DALI control
- ✓ Normal and Through-Wiring cabling options



### GALIS Mega

25 W – 130 W  
3500 lm – 18800 lm

**OPTIC**  
15° / 25° / 40° / 60° / 90° /  
Asymmetric Lens




### GALIS Mega - Tempered Glass + Lens

25 W – 130 W  
3500 lm – 18800 lm

**OPTIC**  
15° / 25° / 40° / 60° / 90°


## Technical Drawing | Feeding From Side

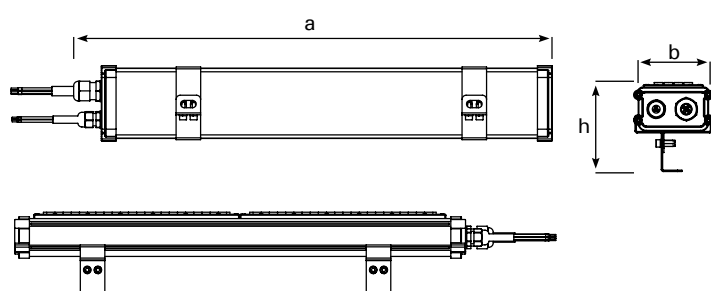

### Dimensions (mm)

	a	b	h
Galis Mega Feeding From Side	585	93	107
Galis Mega Feeding From Top	550	93	132


## Technical Drawing | Feeding From Top

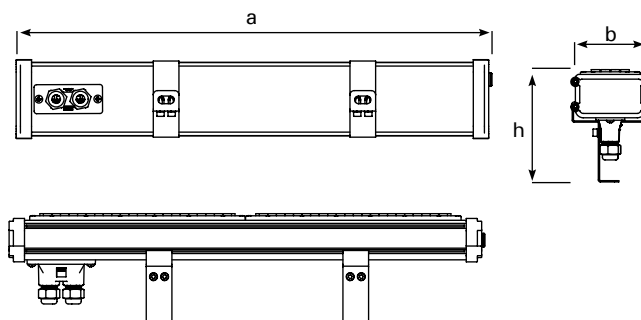


### Weight (kg)

Standard	1,70
Standard EMG Kit	2,00
DALI + EMG Kit	2,00


## Fixed Hanger Set




## Angular Hanger Set (Standard or Stainless Steel Version)




## Angular Double Hanger Set

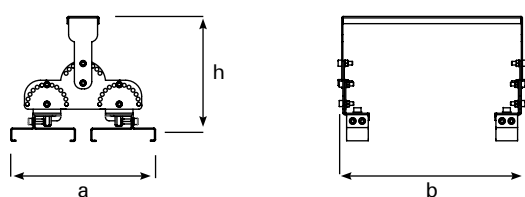

## Double Hanger Set

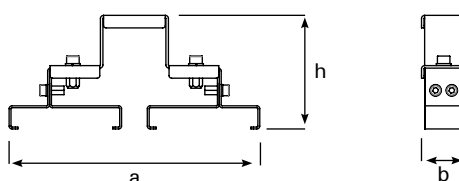

## Angular Triple Hanger Set

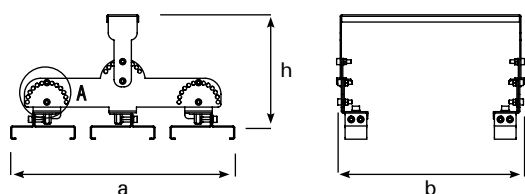

### Dimensions (mm)

	a	b	h
Fixed Hanger Set	89	30	63
Angular Hanger Set	90	41	105
Angular Double Hanger Set	200	243	172
Double Hanger Set	199	36	90
Angular Triple Hanger Set	309	250	154

# GALIS

## NG / MINI

-20°C +40°C



- Parking Lots
- Warehouses
- Wet and Humid Environments

## Maximum performance for extreme conditions

- ✓ High performance waterproof LED luminaire designed for durability and energy efficiency.
- ✓ Rugged aluminum extruded housing with IP66 protection and IK08 impact resistance.
- ✓ Operates reliably in ambient temperatures from -20°C to +40°C.
- ✓ Suitable for surface mounted, ensuring versatile installation options.
- ✓ Quick and easy electrical connection for efficient setup.



### GALIS NG

18 W – 77 W  
2298 lm – 9230 lm

**OPTIC**  
Transparent Glass


### GALIS MINI

10 W – 50 W      10 W – 36 W  
929 lm – 5892 lm      929 lm – 3924 lm

**OPTIC**  
Transparent Glass

**OPTIC**  
Sanded Glass

## Technical Drawing

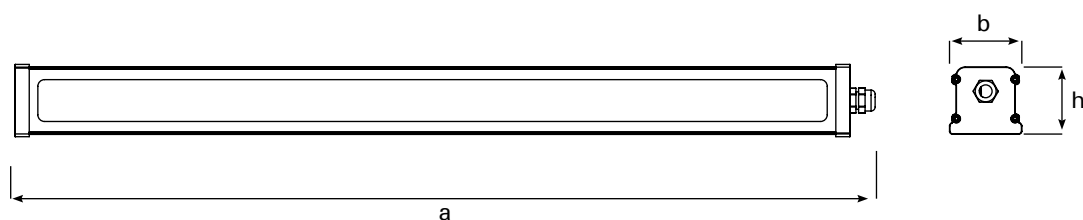

### Dimensions (mm) - Galis NG

	a	b	h
53 CM	532	76	70,5
85 CM	852	76	70,5
125 CM	1252	76	70,5
149 CM	1492	76	70,5

### Weight (kg)

53 CM	1,30
85 CM	2,07
125 CM	2,92
149 CM	3,65


### Dimensions (mm) - Galis Mini

	a	b	h
53 CM	530	62	62
100 CM	1000	62	62
125 CM	1250	62	62
149 CM	1490	62	62

### Weight (kg)

53 CM	2,00
100 CM	3,10
125 CM	2,60
149 CM	3,60

## Hanger Spring Set

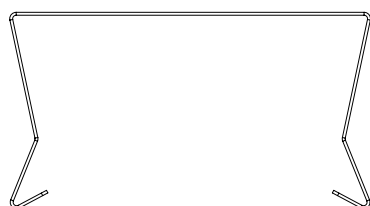



- Logistics
- Data Centers
- Textile
- Retail and Presentation
- Office and Communication
- Education and Science
- Art & Culture

## Solution-oriented, High efficiency lighting

- ✓ Extrusion plastic housing
- ✓ IP65 protection & IK09 impact resistance class / Opal PC diffuser
- ✓ Ambient operating temperature from -20°C to +45°C
- ✓ Different type driver and sensor options for smart lighting / Normal and Through-Wiring options
- ✓ Easy to install and maintain design with advanced features
- ✓ Fewer light lines required with its special optic design for parking garages



**YPB**  
**NG**

24 W – 44 W  
3407 lm – 6072 lm

Batwing

## Technical Drawing




### Dimensions (mm)

	a	b	h
90 CM	893	57	57
120 CM	1175	57	57
150 CM	1580	57	57


### Weight (kg)

90 CM	1,00
120 CM	1,30
150 CM	1,70


### Fixed Hanger Set



### Double Concrete Support Mounting Set



### Angular Hanger Set Wall Mounted

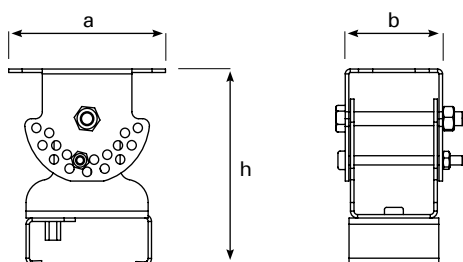

### Dimensions (mm)

	a	b	h
Fixed Hanger Set	54	30	35
Double Concrete Support Mounting Set	54	30	35
Angular Hanger Set Wall Mounted	70	41	85



- Logistics
- Machinery and Electronics
- Data Centers
- Technical Rooms
- Canopy Installations
- Multi-storey Car Parks
- Cold Air Storages

## Easy installation and connection with custom design

- ✓ High performance LED luminaire
- ✓ IP66 protection & IK07 impact resistance class / Aluminum extrusion housing
- ✓ Ambient operation temperature from -20°C to +40°C  
Easy installation and connection
- ✓ Eye-friendly opal diffuser
- ✓ Easy assembly feature
- ✓ Various light angle options
- ✓ Normal and Through-Wiring Options
- ✓ Up to 3 hours emergency kit options / Different type driver options for smart lighting




**LINA  
NG**

25 W – 84 W  
2800 lm – 8900 lm

**OPTIC**  
Opal Diffuser




## Technical Drawing



## Dimensions (mm)

	a	b	h
60 CM	598	85	69
90 CM	898	85	69
120 CM	1198	85	69
150 CM	1498	85	69


## Fixed Hanger Set

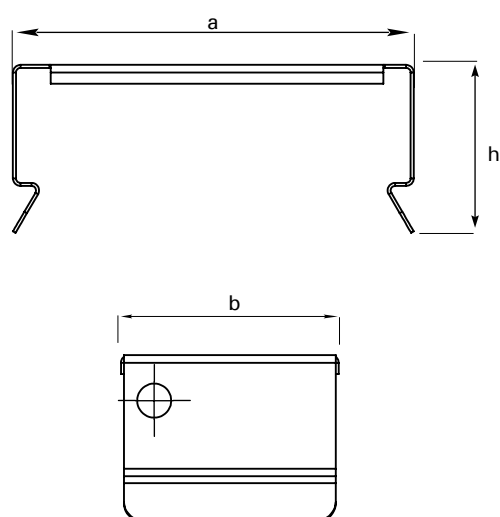

## Dimensions (mm)

	a	b	h
Fixed Hanger Set	53	29	22,2
Angular Hanger Set	70	41,2	105,5

## Angular Hanger Set

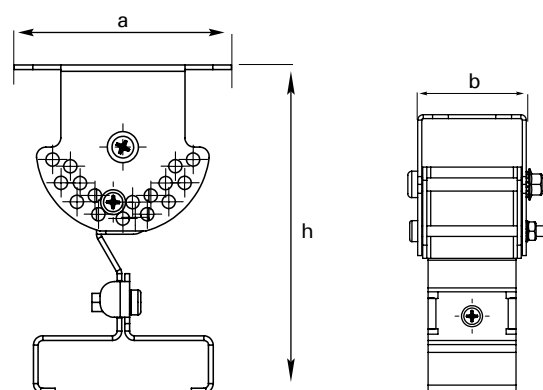

# TORNADO

-20°C +40°C



## Durable, efficient and comfortable lighting

- ✓ High protected LED luminaire
- ✓ IP66 protection & IK08 impact resistance class
- ✓ Ambient operating temperature from -20°C to +40°C
- ✓ Up to 3 Hours emergency kit options / DALI Control

- Industrial Plants
- Aviation and Airports
- Mixed Buildings
- Logistics
- Metro & Rail Systems
- Sports Halls



### TORNADO

24 W – 80 W  
3227 lm - 10417 lm

**OPTIC**  
Opal Diffuser




### TORNADO HE

10 W – 80 W  
1781 lm - 12295 lm

**OPTIC**  
Opal Diffuser

## Technical Drawing

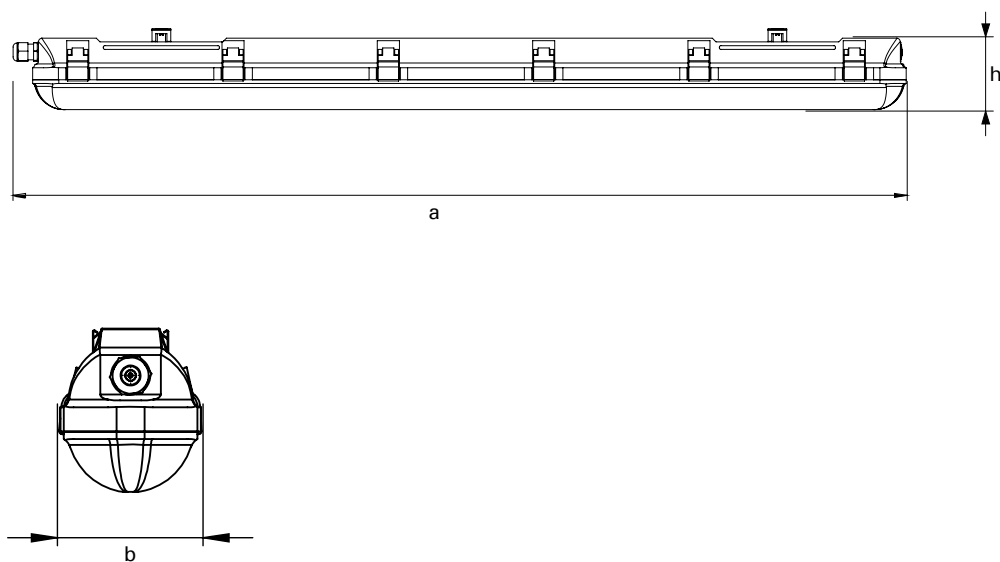

### Dimensions (mm)

	a	b	h
60 CM	600	98	84
120 CM	1175	98	84
150 CM	1455	98	84

### Weight (kg)

60 CM	0,80
120 CM	1,95
150 CM	2,20

# COZAR


-20°C +40°C



- Industrial Plants
- Aviation and Airports
- Mixed Buildings
- Logistics
- Metro & Rail Systems
- Sports Halls

## Economical lighting solution for humid areas

- ✓ IP65 - IP66 protection & IK09 impact resistance class / Plastic extruded housing
- ✓ Ambient operating temperature from -20°C to +40°C
- ✓ Up to 3 Hours emergency kit options / DALI Control
- ✓ Normal and Through-Wiring options
- ✓ Easy assembly feature



### COZAR IP65 PLUS

19 W – 75 W  
2079 lm – 8347 lm


Opal Diffuser



### COZAR IP66

19 W – 75 W  
2079 lm – 8347 lm

Opal Diffuser




### COZAR PLUS BPL

19 W – 75 W  
2079 lm – 8347 lm

Opal Diffuser

*The values specified above represent the minimum and maximum ranges for all variations of the product.  
To access the technical specifications of the product that best suits your needs, please visit our website or contact our sales representative.*

## Technical Drawing

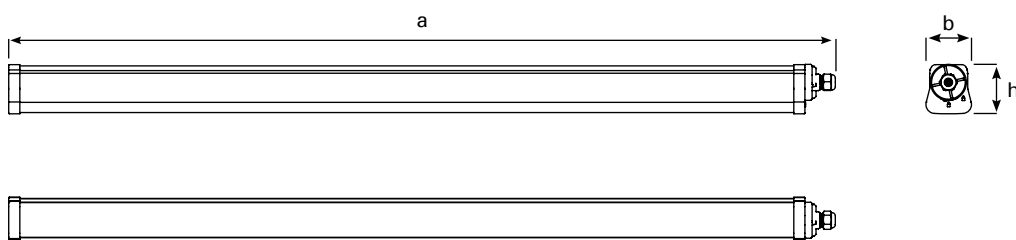


## Dimensions (mm)

	a	b	h
545 cm	545	69	75
865 cm	865	69	75
1265 cm	1265	69	75
1505 cm	1505	69	75


## Weight (kg)

545 cm	1,00
865 cm	1,50
1265 cm	1,90
1505 cm	2,20


## Angular Hanger Set

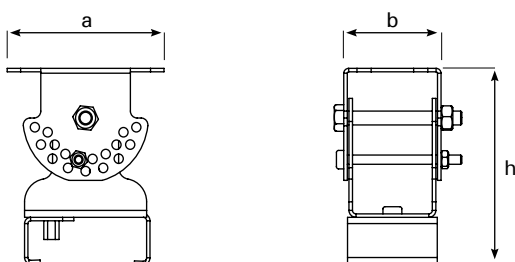


## Long Hanger Spring Set

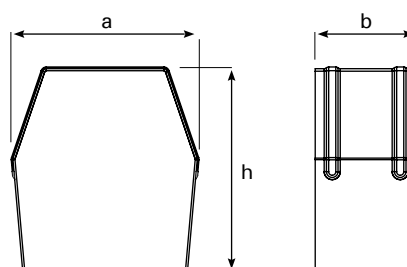

## Cable Tray Hanger Set



## Wall Hanger Set



## Dimensions (mm)

	a	b	h
Angular Hanger Set	70	41	85
Long Hanger Spring Set	55	30	60
Cable Tray Hanger Set	54	35	30
Wall Hanger Set	54	35	30



- Parking Lot
- Logistics
- Industrial Areas

## Great performance output

- ✓ IP66 protection & IK09 impact resistance class / Plastic extruded housing
- ✓ Ambient operation temperature from -20°C to +35°C
- ✓ Eye-friendly opal diffuser
- ✓ Different types of drivers for smart lighting
- ✓ Normal and Through-Wiring options




**YPL**  
**NG**

30 W – 53 W  
3013 lm – 5870 lm

Opal Diffuser

## Technical Drawing




### Dimensions (mm)

	a	b	h
85 cm	853	57	57
120 cm	1255	57	57
149 cm	1500	57	57


### Weight (kg)

85 cm	0,90
125 cm	1,00
149 cm	1,30


### Fixed Hanger Set



### Double Concrete Support Mounting Set

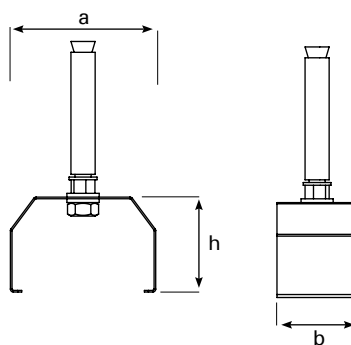

### Angular Hanger Set

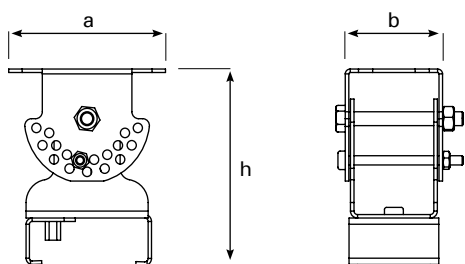

### Dimensions (mm)

	a	b	h
Fixed Hanger Set	54	30	35
Double Concrete Support Mounting Set	54	30	35
Angular Hanger Set	70	41	85

# TORIA MEGA

-20°C +40°C



- Shipyards
- Ports
- Shipbuilding Facilities
- Aircraft Hangars
- Passenger Ship Facades
- Industrial Areas
- Parking Lots
- Outdoor Facilities

## Engineered for endurance, Illuminating tomorrow

- ✓ The Toría Mega luminaire stands out with exceptional durability and cutting-edge LED technology.
- ✓ IP Protection Class IP65 provides complete protection against dust and water, ensuring reliable performance even in harsh conditions.
- ✓ IK Impact Resistance Class IK09 offers enhanced resistance to mechanical impacts, making it ideal for industrial areas, parking lots, and outdoor applications.
- ✓ Available in power choices from 15W to 70W with a broad color temperature range of 3000K to 6500K, delivering tailored lighting solutions for any environment.
- ✓ Offers homogeneous light distribution to enhance visual comfort.
- ✓ Constructed with a minimalist aluminum extrusion body that combines modern aesthetics with functionality.
- ✓ Performs reliably in temperatures from -20°C to +40°C, ensuring maximum durability for both indoor and outdoor applications.



TORIA  
MEGA

15 W – 70 W  
2190 lm – 9230 lm

OPTIC  
Opal Diffuser



## Technical Drawing | Single Module




### Dimensions (mm)

	a	b	h
60 CM	615	87	70
90 CM	916	87	70
120 CM	1216	87	70
149 CM	1457	87	70


### Weight (kg)

60 CM	1,05
90 CM	1,13
120 CM	1,56
149 CM	1,99


### Busbar Hanger Set

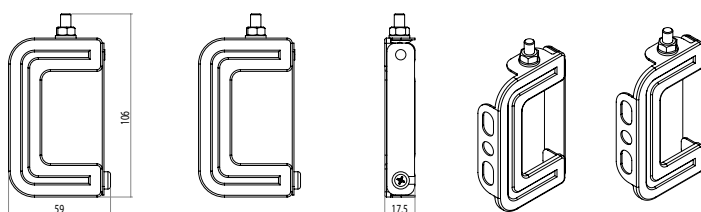


### Standard Hanger Set

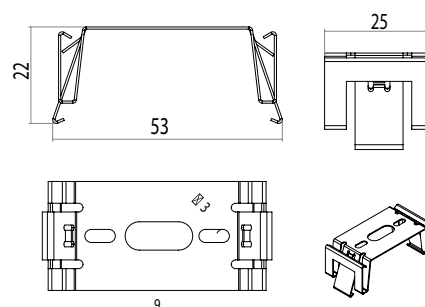


### Angled Hanger Set (Stainless)

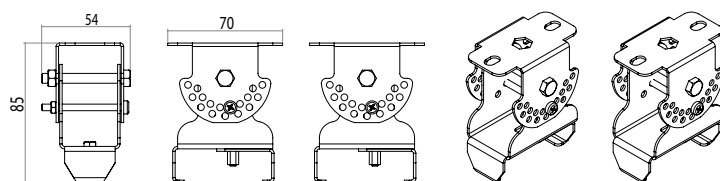

### KYS Busbar Hanger Set

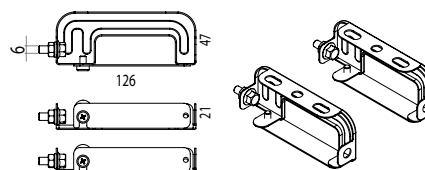

### Fixed Hanger Set

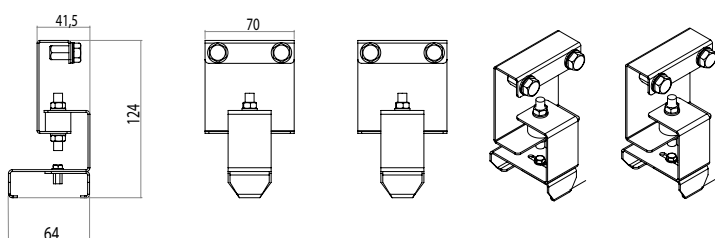

# SAVIOR MATE



- Tunnels
- Mining areas
- Other harsh working environments

+5°C +50°C



## Designed for urgent needs

- ✓ Savior Mate provides a reliable lighting solution in environments where power outages occur or access to electricity is limited.
- ✓ Uninterrupted lighting, provides continuous illumination for up to 3 hours.
- ✓ Practical use: Equipped with an on/off switch for instant operation when needed.
- ✓ IK09 impact resistance class
- ✓ Available with 5W in battery mode




SAVIOR  
MATE

10W  
1620 lm

OPTIC  
PC Lens

## Technical Drawing

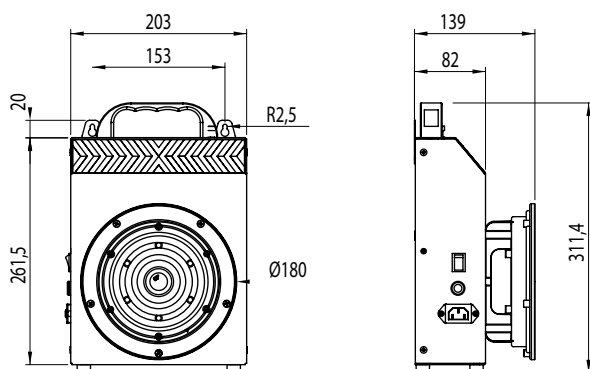


## Dimensions (mm)

	a	b	h
Standard	261,5	203	139


## Weight (kg)

Standard	2,75


## Angled Wall Ceiling Hanger Set

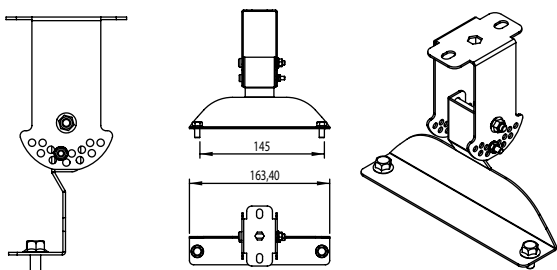


## Busbar Hanger Set

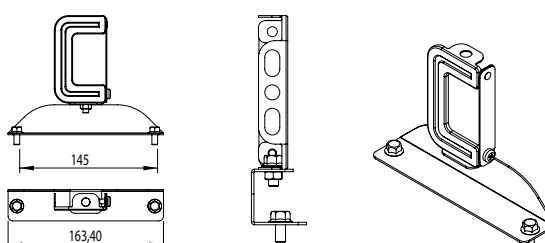

## Cable Tray Hanger Set

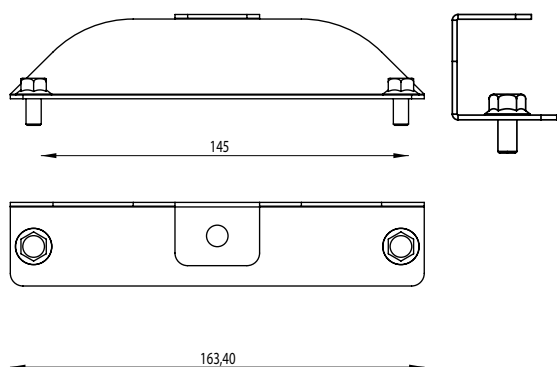

## KYS Busbar Hanger Set

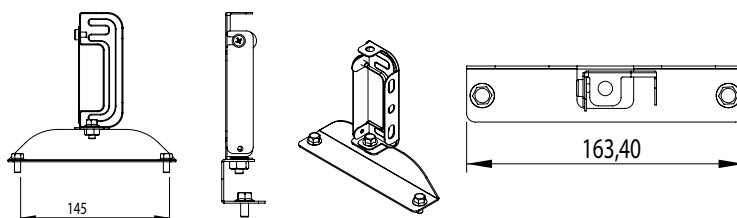




# Meet Sustainable Energy Saving!

Dimko is used as a signal generator in light control devices, dimmer/increase control of time relays. The module is an EAE Lighting control solution that allows the user to adjust the time and lighting level.



## DIMKO SCENARIO

System opening and closing hours can be set with 7 different scenarios according to summer and winter months.

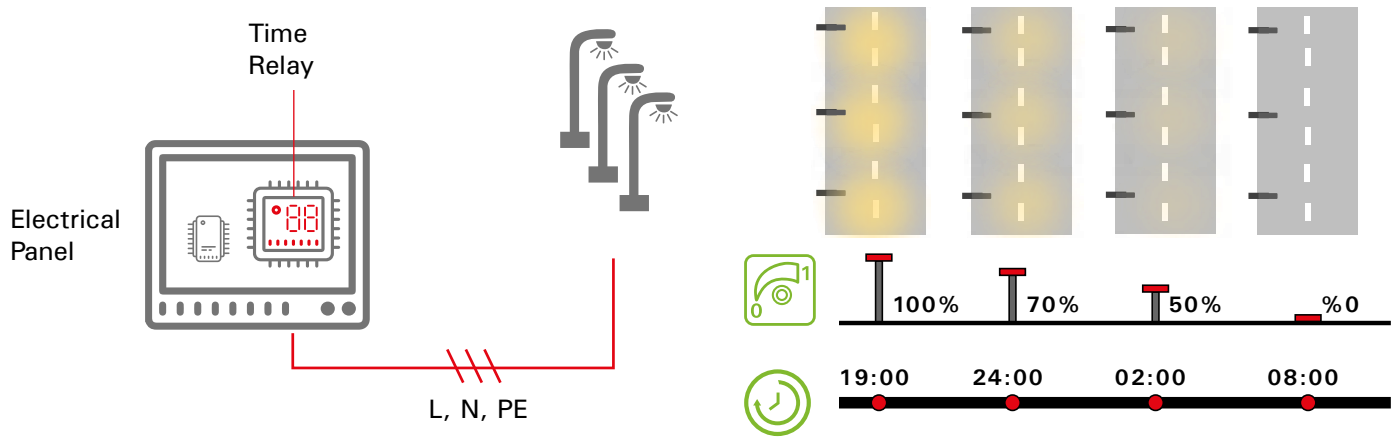

## Products compatible with DIMKO



RA

RA 2

RA 3

ARKTOS

# DIMKO



## Quick, easy and affordable...

**%81**

Energy savings up to 81%.



No maintenance costs.



Dimming system that does not harm the ecosystem.



**%55**  
ABOVE

Savings of more than 55% on lighting expenses.



**Advantageous installation**

Installation without expensive duct excavations.



**Efficient time management.**

It can be programmed within 40 seconds.



**Possibility of use with existing infrastructure**

No need to replace existing luminaires and poles.



**Simple control**

Provides control without the need for a team of experts.



PROLIT



PROLIT PLUS



PROLIT KOMPAKT



PROLIT-M PRM  
V.2



EAE LIGHTING Industry Lighting Products Catalog (English) - Updated: 5.03.2025  
EAE Lighting reserves the right to make changes deemed necessary without prior notice.  
Please contact us for more information about the products and details in the catalog.



**EAE Lighting**  
İkitelli OSB Mah. Eski Turgut Özal Cad.  
EAE No: 20, İç Kapı No: Giriş Kat  
Başakşehir / İSTANBUL - TÜRKİYE  
Tel : +90 212 413 21 00 (pbx)  
Faks : +90 212 549 37 90  
[www.eaelighting.com](http://www.eaelighting.com)



*engineering the light*